

2022 IMPLEMENTS CATALOG



WITH OVER 50 MODELS
FOR SUB-COMPACT AND
COMPACT TRACTORS



MASSEY FERGUSON



A POWERFUL TEAM TAKES THE FIELD



YOUR MISSION IS SIMPLE: TO GET THE JOB DONE. YOU DON'T WANT EVERY BELL AND WHISTLE. YOU WANT POWER, EFFICIENCY, SAFETY – AND RELIABILITY.

How do we know? Because Massey Ferguson has been working alongside farmers for more than 160 years. It's how we've come up with innovations farmers really need — like the first three-point hitch. And the most productive CVT transmission in the world.

THE PERFECT MATCH

Now Massey Ferguson has teamed up with Woods Equipment, a company that's also steeped in tradition and innovation. Both companies have been around for generations — something you can count on to continue.

Together, we offer you an impressive combination of power and reliability — whether you're cutting tough brush or maintaining a pristine landscape.

IMPLEMENTING RELIABILITY

Long known for equipment that's easy to operate and loaded with safety features, Woods joins Massey Ferguson in delivering a total package that includes the right tractor with a full range of quality implements. Put them together, and you've got one reliable farming solution.

FIND A DEALER

To learn more and find the dealer near you, go to masseyferguson.us

INNOVATION SINCE 1946

Woods' long history of innovation began with Leonard W. Wood and his brothers, Mervel and Keith. In a post-war era, Oregon, Illinois, ripe for entrepreneurship, the brothers worked together to build the first successful tractor-mounted rotary cutter, and eventually founded Woods Brothers Manufacturing Co., in 1946.

Since that time, Woods has secured over 65 patents and built a global footprint in agriculture machinery with manufacturing and distribution throughout North America, Latin America and Australia. Today, Woods attachments and implements are used for mowing roadsides and parcels, maintaining pastures and waterways, shredding crops, and countless other applications.

WOODS
GET AFTER IT

WHAT'S INSIDE

Batwing® Cutters	4
12-foot Batwing®	6
15-foot Batwing	8
20-foot Batwing	12
Rigid Rotary Cutters	14
BrushBull™ Single-spindle Premium Cutters	14
RC-series Single-spindle Standard Cutters	20
Dual-spindle Cutters	22
Offset Dual-spindle	25
Finish Mowers	27
TurfKeeper™ Rear-mount Mowers	28
TurfKeeper Pro™ Rear-mount Mowers	30
RD990X Rear Discharge Mower	32
Turf Batwing® Mowers	33
Seeders	36
Food Plot Seeders	38
Precision Super Seeders	39
Compact Super Seeders	40
Tillage Equipment	44
Rotary Tillers	44
Disc Harrows	48
Dirt Working	50
Quick Hitch	51
Box Scrapers	52
Grading Scrapers	53
Rear Blades	54
Landscape Rakes	58
Post Hole Diggers	60

TOP FIVE IMPLEMENTS

SEE PAGES 62-63 FOR
THE TOP 5 IMPLEMENTS
EVERY FARM NEEDS.

Batwing® **ROTARY CUTTERS**

**WE NOT ONLY BUILD
THE TOUGHEST BATWING®,
WE BUILD THE ONLY BATWING.**

PROVEN DURABILITY

We not only build the toughest Batwing®, we build the only Batwing. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing for the sheer ability to tame the most unruly fields, waterways, pastures and roadsides.

UNBEATABLE PERFORMANCE

The Batwing is designed with a high torque capacity, a deep deck with welded baffles, and our easy tractor hook-up so you will get to work quickly and mow more material in less time. Woods Batwing cutters set the standard for cut quality, distribution and ease of use, whether you're cutting brush or shredding stalks.





ROTARY CUTTERS | **12' Batwing®**

The original Batwing in a 12-foot width, designed specifically for compact tractors.



BW12

* NOTE: All Batwing models with removable shielding have been tested without shielding and pass all applicable safety standards for thrown objects. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

ROTARY CUTTERS | 12' Batwing®



BW12

Shown with standard chain shielding.

TRACTOR PTO HP RANGE: MINIMUM 35 HP

BW12 | 12-foot Flexwing Cutter for Compact / Utility Tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs. with 750-lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve-gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Easy hook-up reduces preparation time and frustration.
- Fully baffled deck ensures better distribution of cut material, and the performance you expect from Woods.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding, for added safety and peace of mind.


MODEL	BW12
Tractor PTO (HP)	35 minimum
Tractor Hitch	Swivel clevis
Cutting Width (ft)	12
Adjustable Cutting Height (in)	2 - 12
Cutting Capacity (in)	1.5
Gearbox Rating (HP)	160 - splitter / 75 - center and wing
Blade Tip Speed (fpm)	14,300 center / 14,900 wing
Deck Thickness (ga)	12, high-strength steel
Side Frame Thickness (ga)	7
Deck Side Depth (in)	11
Weight (tongue/total) (lbs)	750 / 2,450
Blade Dimensions (in)	.5 x 4
Blade Overlap (in)	6
Hydraulics Wing Flex (degrees)	90 up, 22 down
Tires	Laminated; new AG; foam-filled
Suspension	Spring on center section
PTO Driveline (main/wing)	CAT 4 / CAT 3
Cutting Area Shielding	Standard chain shielding
Warranty (cutter/gearbox)	6-year



BATWING®

**IF IT'S NOT WOODS®,
IT'S NOT A BATWING.**

The customer-designed 15-foot series Batwing from Woods.
It's more reliable, more durable, easier-to-use, easier-to-maintain and built
to perform better. It's the flexwing cutter you always wanted, you just
needed a company to build it.

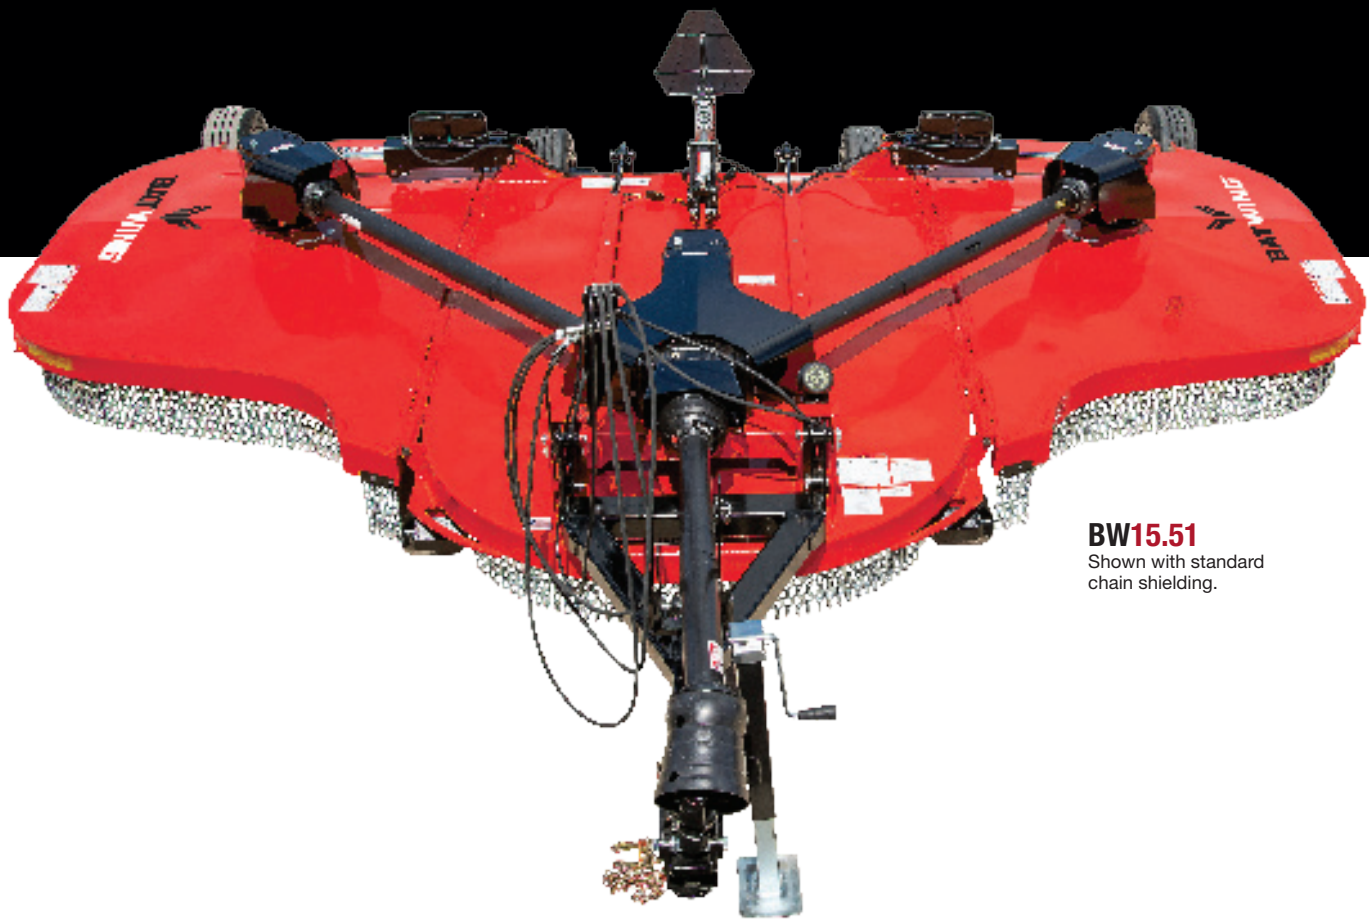

BW15.51
Shown with standard
chain shielding.

ROTARY CUTTERS | 15' Batwing®

Maintain grassy fields, pastures, waterways, parks and airports; cut weeds and light brush up to 3 inches in diameter.



BATWING®

BW15.51
Shown with standard chain shielding.

TRACTOR PTO HP RANGE: 45 - 200 HP

BW10.51 | 10.5-foot Flexwing Cutter

BW15.51 | 15-foot Flexwing Cutter

The BW15.51 is ideal for cutting tall grasses and saplings up to 3 inches in diameter.

Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- Patented driveline lift assistance system makes it easy to hook up; standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- Our gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Patented greaseable Quick-change blade pins are easy to remove.
- Patented regressive spring design reduces shock transfer and wear to cutter body.

NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.

MODEL	BW10.51*/BW15.51
Tractor PTO (HP)	45 - 200
Adjustable Cutting Height (in)	2 - 15
Cutting Capacity (in)	3
Cutting Width (in)	126 / 180
Blade Tip Speed (fpm)	15,000 at 540 rpm 16,000 at 1000 rpm
Weight (lbs)	4,040 / 4,340
Tongue Weight (lbs)	1,150 / 1,200
Center Deck / Wing Deck (ga)	10
Side Skirt Thickness (in)	.25
Side Skirt Depth (in)	13
Transport Width (in)	93 / 96
Stump Jumper	Round
Hydraulics Wing Flex (degrees)	90 up, 22 down
Driveline Rating	CAT 6 CV main / CAT 4 wing
Splitter Gearbox Rating (HP)	210
Wings Gearbox Rating (HP)	200
Output Shaft Size (in)	2
Gearbox Warranty	6-year
Options	<ul style="list-style-type: none"> • Double row chain shielding • Dual wheels

* Single-wing version

ROTARY CUTTERS | 15' Batwing®

Maintain grassy fields, pastures, waterways, parks and airports; cut heavier brush and trees up to 4.5 inches in diameter.



TRACTOR PTO HP RANGE: 55 - 275 HP

BW10.61 | 10.5-foot Flexwing Cutter

BW15.61 | 15-foot Flexwing Cutter

The BW15.61 easily powers through tall brush and trees up to 4 inches in diameter.

TRACTOR PTO HP RANGE: 65 - 300 HP

BW10.71 | 10.5-foot Flexwing Cutter

BW15.71 | 15-foot Flexwing Cutter

The rugged BW15.71 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

SLOPED DECK

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution.



BW15.61

Shown with standard chain shielding.

GEARBOXES

Massive, heavy-duty gearboxes deliver more cutting power and performance with a six-year limited warranty.



ROTARY CUTTERS | 15' Batwing®

MODEL	BW10.61* / BW15.61	BW10.71* / BW15.71
Tractor PTO (HP)	55 - 275	65 - 300
Adjustable Cutting Height (in)	2 - 15	
Cut Capacity (in)	4	4.5
Cutting Width (in)	126 / 180	
Blade Tip Speed (fpm)	15,700 at 540 rpm 16,000 at 1000 rpm	
Weight (lbs)	4,400 / 4,600	5,500 / 5,290
Tongue Weight (lbs)	1,290	1,490 / 1,530
Center Deck / Wing Deck (ga l in)	7	1/4
Side Skirt Thickness (in)	.25	
Side Skirt Depth (in)	13	
Transport Width (in)	93 / 96	
Stump Jumper	Round	
Hydraulic Wing Flex (degrees)	90 up / 22 down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating (HP)	275	
Wings Gearbox Rating (HP)	225	
Output Shaft Size (in)	3	
Gearbox Warranty	6-year	
Options	<ul style="list-style-type: none"> • Double row chain shielding • Dual wheels • Shredding kit • Deck ring • Spring axle • Full walking tandem 	

* Single-wing version

- Patented driveline lift assistance system makes it easy to hook up.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- Our gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Patented greasable Quick-change blade pins are easy to remove.

PLUS,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.61) or .25 inch thick steel (.71) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .61 and .71 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include double row chain shielding, dual wheels and, for the .61 and .71 models, a shredding kit for added versatility.

NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.

SKID SHOES

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning.



BW15.71

Shown with standard chain shielding.


ROTARY CUTTERS | 20' Batwing®



QUICK-CHANGE GREASABLE BLADE SYSTEM

Woods' exclusive Quick-change blade system allows for easy changing of blades from the top of the deck.

MODEL	BW20.51 / BW20.61
Tractor PTO (HP)	70 - 200 / 70 - 300
Main Driveline	CAT 6 CV
Wing Driveline	CAT 4 telescoping profile
Tractor Hitch	Clevis/self-leveling clevis; optional pintel ring
Cutting Width (in)	240
Adjustable Cutting Height (in)	2 - 15
Cutting Capacity (in)	2/3
Side Frame Depth (in)	13.25
Tractor PTO (rpm)	540 or 1,000
Transport Width (in)	123
Overall Width x Length (in)	250 x 198
Deck Type	Smooth, sloped
Deck Thickness (in)	.135
Side Frame Thickness (in)	.25
Hinges/Hinge Rod Diameter (in)	1
Weight (lbs)	6,510 / 6,600
Number of Gearcases	4
Vertical Shaft Size	2/2.38
Splitter/Wing (HP)	250 / 120 / 250 / 205
Blade Thickness (in)	.5
Blade Width (in)	4
Blade Type	Hi-lift, flat or shredder
Blade Overlap (in)	6
Blade Tip Speed (fpm)	15,450 at 540 rpm 16,300 at 1000 rpm
Material Flow System	Standard baffles
Stump Jumper Type	Standard round-welded
Hydraulics Wing Flex (degrees)	90 up, 22 down
Suspension	Standard spring suspension or tandem spring arms
Wheel Type (in)	15 rims; 21 laminated; 29 used aircraft
Cutting Area Shielding	Single or double chain
Gearbox Warranty	6-year limited

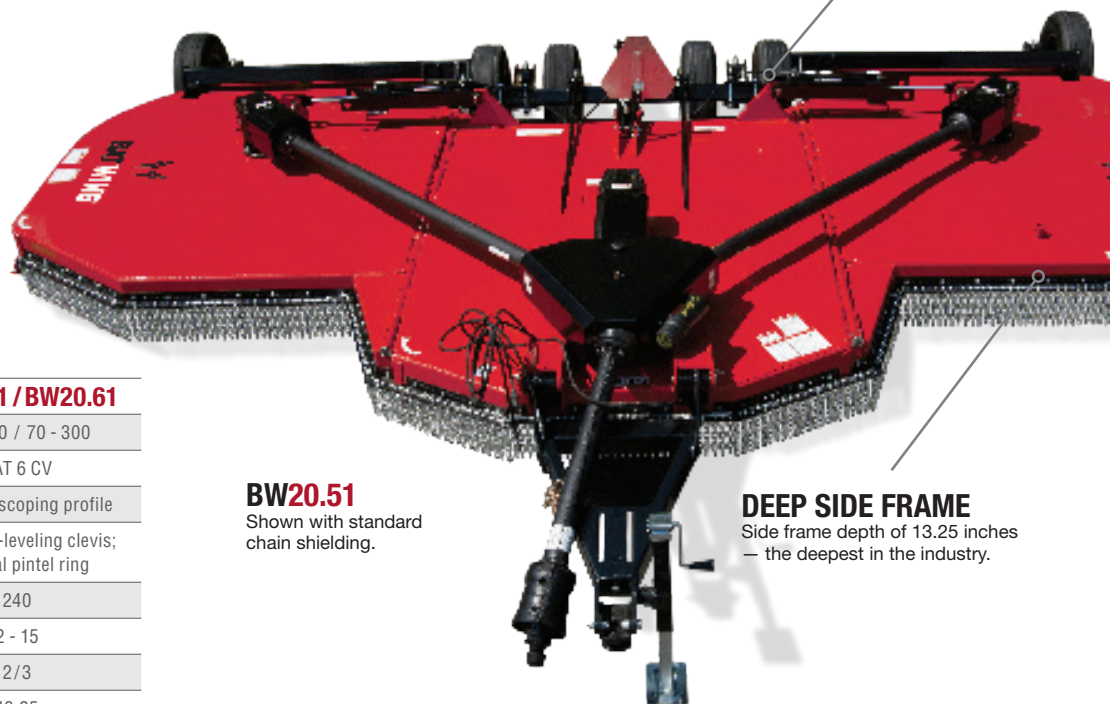

GREASABLE PIVOT PINS

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear.

BW20.51

Shown with standard chain shielding.

DEEP SIDE FRAME

Side frame depth of 13.25 inches — the deepest in the industry.

TRACTOR PTO HP RANGE: 70 - 200 HP

BW20.51 | 20-foot Flexwing Cutter

- Main driveline: CAT 6 CV.
- Cuts brush up to 2 inches in diameter.
- Walking tandem axle available.

TRACTOR PTO HP RANGE: 70 - 300 HP

BW20.61 | 20-foot Flexwing Cutter

- Maintain driveline: CAT 6 CV.
- Cuts brush up to 3 inches in diameter.
- Side frame depth of 13.25 inches — the deepest in the industry.
- Optional shredding kit.



*** NOTE:** All Batwing models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

ROTARY CUTTERS | 20' Batwing®

TRACTOR PTO HP RANGE: 70 - 300 HP

BW20.71 | 20-foot Flexwing Cutter

BW13.71 | 13.5-foot Single-wing Cutter

- Main driveline: CAT 6 CV.
- Deck plate has two layers of .135 inch plate.
- Cuts brush up to 4 inches in diameter.
- Side frame depth of 12.5 inches.
- Optional dual tires available for wings.
- Optional shredder kit or optional blade ring.
- Six-year gearbox limited warranty.

BW20.61

Shown with standard chain shielding.

MODEL	BW20.71	BW13.71 (SINGLE-WING)
Tractor PTO (HP)	70 - 300	
Main Driveline	CAT 6 CV	
Wing Driveline	CAT 5	
Tractor Hitch	Self-leveling swivel clevis; optional pintle ring	
Cutting Width (in)	240	162
Adjustable Cutting Height (in)	2 - 15	
Cutting Capacity (in)	4	
Side Frame Depth (in)	12.5	
Tractor PTO (rpm)	540 or 1,000	
Transport Width (in)	99	99
Overall Width x Length (in)	250x198	171x198
Deck Type	Smooth, sloped double-deck	
Deck Thickness (in)	.135 / .135 upper/lower	
Side Frame Thickness (in)	.25	
Hinges/Hinge Rod Diameter (in)	1 full length	
Weight (lbs)	7,740	8,500
Number of Gear cases	4	3
Vertical Shaft Size (in)	2.38	
Splitter Wing (HP)	225/275	
Blade Thickness (in)	.5	
Blade Width (in)	4	
Blade Type	Hi-lift, flat or shredder kit	Hi-lift, flat
Blade Overlap (in)	6	
Blade Tip Speed (fpm)	15,450 at 540 rpm 16,300 at 1000 rpm	
Material Flow System	Standard baffles	
Stump Jumper Type	Standard round-welded	
Hydraulics Wing Flex (degrees)	90 up, 22 down	Left or right wing – 90 up, 22 down
Suspension	Standard spring suspension or optional tandem spring arms	
Wheel Type (in)	15 rims; 21 laminated; 29 used aircraft	
Cutting Area Shielding	Single or double chain	
Gearbox Warranty	6-year limited	

ROTARY CUTTERS | **BrushBull™ Single-spindle**

RUGGED AND RELIABLE, THE WOODS BRUSHBULL™ IS BUILT TO TACKLE YOUR TOUGHEST BRUSH CUTTING CHORES.

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.



START AT THE BEGINNING

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovations such as greasable Quick-change blade pins and a smooth, sloped deck that sheds debris.

And yet, we still go back to customers like you before redesigning a product. Erasing preconceptions, we listen – really listen – to what you need and value. Then, Woods Engineers go to work creating a product that you will love to use.

Finally, we make it just a bit more durable, kick up the performance and add style, because that's what people expect from Woods.

The top-selling Woods BrushBull™ is easy to use and maintain, delivers superior cut quality and performance, and looks good doing it. Year after year after year.



TRACTOR PTO HP RANGE: 15 - 75 HP

BB48.30 | 48-inch

BB60.30 | 60-inch

BB72.30 | 72-inch

- Three-point hitch: CAT 1.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.



TRACTOR PTO HP RANGE: 35 - 90 HP

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & CAT 2, quick-hitch ready.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- 11-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel for adjusting the mowing height.



BB72.30

Shown with optional chain shielding.

MODEL
Tractor PTO (HP)
Hitch Category/Type
Cutting Width (in)
Total Weight with Chain Shield (lbs)
Cutting Capacity Diameter (in)
Adjustable Cutting Height (in)
Transport Width (in)
Overall Length (in)
Tractor PTO Speed (rpm)
Quick-hitch Ready
Rear Bumper
Frame & Deck Support (in)
Deck Construction
Skid Shoes
Deck Thickness (ga in)
Side Frame Thickness (ga in)
Side Frame Depth (in)
Gearbox Warranty
Gearbox (HP)
Output Shaft Diameter (in)
Blade Tip Speed (fpm)
Blade Dimensions (in)
Blade Pin Diameter (in)
Blade Carrier
Driveline Protection
Options

BB48.30	BB60.30	BB72.30	BB84.40
15 - 50	25 - 50	30 - 75	35 - 90
CAT 1 clevis			CAT 1 & CAT 2 clevis
48	60	72	84
635	728	878	1,118
2	2	2	2
1 - 9			2 - 12
55	67	79	91
86	99	111	124
540			540
Yes			Yes
Z-channel			Z-channel
3 x 3 tube			3 x 3 tube
Smooth top, sloped			Smooth top, sloped
Full-length, replaceable			Full-length, replaceable
12 .105		11 .120	11 .120
10 .135			10 .135
10.5			11.6
6-year limited			6-year limited
65	65	75	90
1.57			2
13,000	14,335	14,963	15,086
.50 x 4			.50 x 4
1.50			1.50
Oval stump jumper			Oval stump jumper
Slip-clutch			Slip-clutch
Check chain			Check chain, dual tailwheel

ROTARY CUTTERS | **BrushBull™ Single-spindle**

Easy to Operate

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull cutter to meet – and exceed – your needs. An adjustable drive lift hanger and Quick-hitch readiness make it easy to attach. A large access window on top of the deck and our exclusive, greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

Proven Durability

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

Easy to Maintain

Woods was the first to introduce a smooth, sloped deck that sheds debris. Front corners angle back to give operators more room between the tractor tire and cutter.



**QUICK-HITCH
READY**

DRIVELINE HANGER

Adjustable driveline hanger makes it easier to attach, and is standard on all models.

MORE ROOM

Corners angle back to give operators more room between the tractor tire and cutter when connecting and disconnecting cutter to tractor.

SKID SHOES

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

SLOPED DECK

Smooth, sloped deck sheds debris and is easy to clean.

ROTARY CUTTERS | **BrushBull™ Single-spindle**



HEAVY-DUTY GEARBOXES

New, advanced gearbox seal technology is designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

EASY MAINTENANCE

Greasable Quick-change blade pins are easy to maintain and remove.



QUICK-CHANGE GREASEABLE BLADE SYSTEM

A large blade access window makes it easy to reach our exclusive Quick-change pins and quickly change the blade from the top of the deck.

EXTRA DURABILITY AND HIGHER PERFORMANCE UNDER THE DECK, TOO!



Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.

The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.

A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.

The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.

BB60.30

Shown with optional chain shielding.

HIGH-STRENGTH STEEL

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.

ROTARY CUTTERS | **BrushBull™ Single-spindle**

TRACTOR PTO HP RANGE: 30 - 150 HP


BB60.50 | 60-inch

BB72.50 | 72-inch

BB84.50 | 84-inch

- Three-point hitch: CAT 1 & CAT 2, CAT 2 & CAT 3, quick-hitch ready.
- Cuts brush up to three inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck manufactured for tough conditions.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tailwheel on models BB72.50 and BB84.50.

MODEL	BB60.50	BB72.50	BB84.50
Tractor PTO (HP)	30 - 150		40 - 150
Hitch Category/Type	CAT 1 & CAT 2 clevis		CAT 2 & CAT 3 clevis
Cutting Width (in)	60	72	84
Total Weight with Chain Shield (lbs)	1,006	1,152	1,331
Cutting Capacity Diameter (in)	3		
Adjustable Cutting Height (in)	2 - 12		
Transport Width (in)	67.3	79.3	91.3
Overall Length (in)	100	112	124
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Rear Bumper	Z-channel		
Frame & Deck Support (in)	3 x 3 tube		
Deck Construction	Smooth top, sloped		
Skid Shoes	Full-length, replaceable		
Deck Thickness (ga in)	10 .135		
Side Frame Thickness (in)	0.25		
Side Frame Depth (in)	12.7		
Gearbox Warranty	6-year limited		
Gearbox (HP)	150		
Output Shaft Diameter (in)	2		
Blade Tip Speed (fpm)	15,525	15,900	16,000
Blade Dimensions (in)	.50 x 4		
Blade Pin Diameter (in)	1.5		
Blade Carrier	Diamond stump jumper, optional round		
Driveline Protection	Slip-clutch		
Options	Check chains, round stump jumper	Check chains, round stump jumper, dual tailwheel	

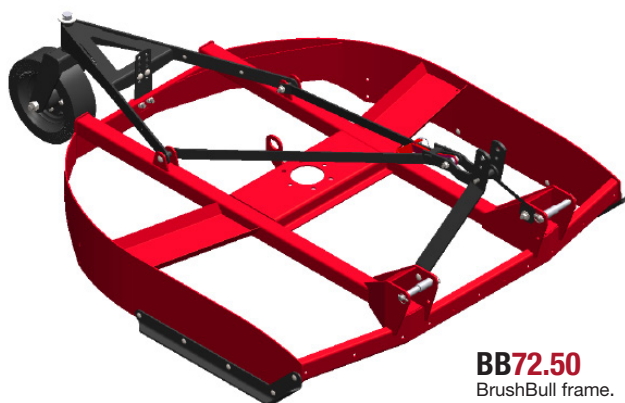

COUNT ON THE INTEGRITY OF THE BRUSHBULL FRAME

- Stress points are tied to full-length three-inch by three-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.

ROTARY CUTTERS | **BrushBull™ Single-spindle**

Put our products to the test in your own backyard. Rugged, dependable and productive – Woods rotary cutters are designed for the extremes of real world use.

TRACTOR PTO HP RANGE: 40 - 210 HP

BB60.60 | 60-inch

BB72.60 | 72-inch

BB84.60 | 84-inch

- Three-point hitch: CAT 1 & CAT 2, CAT 2 & CAT 3, quick-hitch ready.
- Cuts brush and saplings up to four inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck is made for extreme conditions.
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper and check chains for height adjustments.

MODEL	BB60.60	BB72.60	BB84.60
Tractor PTO (HP)	40 - 150	50 - 210	65 - 210
Hitch Category/Type	CAT 1 & CAT 2 clevis		CAT 2 & CAT 3 clevis
Cutting Width (in)	60	72	84
Total Weight with Chain Shield (lbs)	1,082	1,366	1,568
Cutting Capacity Diameter (in)	4		
Adjustable Cutting Height (in)	2 - 12		
Transport Width (in)	67.3	79.3	91.3
Overall Length (in)	100	112	124
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Rear Bumper	Z-channel		
Frame & Deck Support (in)	3 x 3 tube		
Deck Construction	Smooth top, sloped		
Skid Shoes	Adjustable height full-length, replaceable		
Deck Thickness (ga l in)	10 l .135		
Side Frame Thickness (in)	0.25		
Side Frame Depth (in)	12.7		
Gearbox Warranty	6-year limited		
Gearbox (HP)	210		
Output Shaft Diameter (in)	3		
Blade Tip Speed (fpm)	13,570	13,945	14,250
Blade Dimensions (in)	.50 x 4		
Blade Pin Diameter (in)	1.5		
Blade Carrier	Diamond stump jumper, optional round		
Driveline Protection	Slip-clutch		
Options	Check chains, round stump jumper		



ROTARY CUTTERS | **Single-spindle**



WOODS RC-SERIES ROTARY CUTTERS



Breaklink allows cutter to float and follow terrain for better cut quality.



Optional bolt-on replaceable skid shoes for longer wear.



Optional chain shielding for added protection from thrown objects.



AN ECONOMICAL ROTARY CUTTER FOR MAINTAINING GRASSY PASTURES, OPEN FIELDS AND RECREATIONAL TRAILS.

RC-Series Single-spindle Rotary Cutters are the ideal attachment to get the most from your compact or sub-compact tractor. Designed for durability and built with high-strength steel, we confidently stand behind this product with a three-year gearbox warranty.

TRACTOR PTO HP RANGE: 15 - 50 HP

RC48.20 | 48-inch

RC60.20 | 60-inch

RC72.20 | 72-inch

- Three cutting widths to fit the size of your job.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year after year.
- Three-year gearbox warranty is one of the best in the industry.

MODEL	RC48.20	RC60.20	RC72.20
Tractor PTO (HP)	15 - 40	20 - 50	
Hitch Category	CAT 1 cantilevered		
Cutting Width (in)	48	60	72
Adjustable Cutting Height (in)	2 - 9		
Cutting Capacity (in)	1		
Gearbox Horsepower (HP)	50		
Blade Tip Speed (fpm)	13,100	13,620	14,340
Deck Side Depth (in)	7		
Weight (lbs)	410	494	575
xBlade Dimensions (in)	.5 x 3		
Blade Carrier	Oval stump jumper		
Tailwheel (in)	4 x 16 laminated		
Driveline Protection	Shear-bolt or slip-clutch		
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Cutting Area Shielding	Belt standard / chain shielding optional		
Warranty (cutter/gearbox)	1-year / 3-year		

HEAVY-DUTY TAILWHEEL ASSEMBLY

Formed, reinforced A-frame resists bending when backing into immovable objects.

RC72.20

Shown with optional chain shielding.

ROTARY CUTTERS | Dual-spindle

Durable and easy-to-use cutters for both brush cutting and crop shredding.

EASY TO USE

The proven leader in the cutter business delivers a full line of durable easy-to-use rotary cutters for both brush cutting and crop shredding. Choose our 30-, 40-, or 50-series models loaded with features that help you work efficiently and effectively – whatever you're cutting or shredding.

- A floating hitch allows the cutter to follow the terrain. Cross steep inclines and ditches with ease.
- Changing cutting blades is a snap with the exclusive Woods patented Quick-change blade pin system, standard on all gear-driven dual-spindle cutters. 50-series models also feature a large blade access window in the deck.
- The 50-series offers variable wheel spacing so you can adjust the wheels for row crops.

HARD TO BREAK

You'll rely on your Woods rotary cutter for years because we still manufacture them with the same dependable quality that we've delivered since 1946.

- Woods gearboxes feature heat-treated, alloy steel gears that stand up to the demands of rotary cutting.
- Sloped-top decks shed water and debris to prevent rust and corrosion and wrap around a heavy steel super-structure.
- Spring cushion axles reduce stress spikes to keep your Woods rotary cutter delivering high-performance cutting.¹
- Factory-balanced stump jumpers are a standard feature that help you avoid hazards and save blades from wear and tear.

DS8.30

Shown with chain shielding.



SLOPED TOP DECK

Smooth, sloped deck sheds water and debris to prevent rust and corrosion.

DS10.40

Shown with chain shielding.

CV DRIVE

Less maintenance, smoother operation.

¹) N/A on DS8.30 and DS10.40

ROTARY CUTTERS | Dual-spindle



DS8.30

Shown with chain shielding.

30- AND 40-SERIES DUAL-SPINDLE

TRACTOR PTO HP RANGE: 35 - 75 HP

DS8.30 | 96-inch, pull-type

MDS8.30 | 96-inch, 3-point mounted

TRACTOR PTO HP RANGE: 40 - 120 HP

DS10.40 | 120-inch, pull-type

MDS10.40 | 120-inch, 3-point mounted

- Cuts light brush up to 1.5-inches (30-series) to 2-inches (40-series) in diameter.
- Six-year limited gearbox warranty.

MODEL	DS8.30 (pull-type) MDS8.30 (three-point mounted)	DS10.40 (pull-type) MDS10.40 (three-point mounted)
Minimum Tractor PTO (HP)	35 pull-type, 45 mounted	40 pull-type, 60 mounted
Hitch Category / Type	Pull-type: pivoting clevis mounted: CAT 1 or CAT 2 / clevis	Pull-type: pivoting clevis; mounted: CAT 2 or CAT 3 / clevis
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2 - 12	
Cutting Capacity (in)	1.5	2
Gearbox Rating (HP)	100 center, 75 spindle	120 center, 90 spindle
Blade Tip Speed (fpm)	15,200	16,700
Deck Side Depth (in)	10	
Deck Thickness (ga in)	10 .135	
Overall Width (in)	100	124
Overall Length (in)	Pull-type: 142 (25" tires) mounted: 96	Pull-type: 155 (25" tires) mounted: 106
Approximate Weight (lbs)	Pull-type: 1,467 mounted: 1,213	Pull-type: 1,847 mounted: 1,576
Blade Dimensions (in)	.5 x 4	
Wheel Selection	Laminated, severe duty new ag, foam filled new ag, 15 inch rims	
Optional Dual Wheels - Pull-Type	No	
Quick-hitch Ready	Yes	
Gearbox Warranty	6-year	

ROTARY CUTTERS | Dual-spindle

50-SERIES DUAL-SPINDLE

TRACTOR PTO HP RANGE: 40 - 200 HP

DS8.50 | 96-inch, pull-type

MDS8.50 | 96-inch, 3-point mounted

DS10.50 | 120-inch, pull-type

MDS10.50 | 120-inch, 3-point mounted

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- Advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals.

TUBULAR FRONT FRAME


Greater strength and rigidity for towing.

QUICK-CHANGE BLADE PINS

Easy to replace Quick-change blade pins under the deck reduce downtime.

HYDRAULICALLY ADJUSTABLE TAILWHEEL

Hydraulic tailwheel offers a variable cutting range.

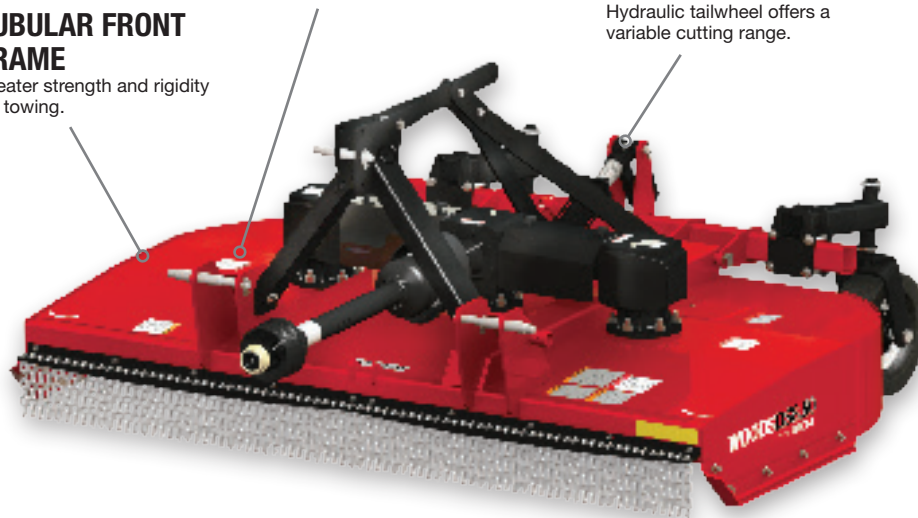

DS8.50


Shown with chain shielding.

MODEL	DS8.50 (pull-type) MDS8.50 (three-point mounted)	DS10.50 (pull-type) MDS10.50 (three-point mounted)
Minimum Tractor PTO (HP)	40 pull-type 55 mounted	50 pull, semi-mounted 65 mounted
Hitch Category/Type	Pull-type: pivoting clevis mounted: CAT 2 or CAT 3 / clevis	
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2 - 12	
Cutting Capacity (in)	3	
Gearbox Rating (HP)	205 center, 160 spindle	
Blade Tip Speed (fpm)	14,886 at 540 rpm	15,974 at 540 rpm, 16,232 at 1000 rpm (MDS only)
Deck Side Depth (in)	13	
Deck Thickness (ga in)	10 .135	
Overall Width (in)	103	127
Overall Length (in)	Pull-type: 150 (25-inch tires) mounted: 99	Pull-type: 162 mounted: 111
Approximate Weight (lbs)	Pull-type: 2,238 mounted: 2,069	Pull-type: 2,537 mounted: 2,373
Blade Dimensions (in)	.5 x 4	
Wheel Selection	Laminated, severe duty new ag, foam filled new ag, 15-inch rims, used aircraft	
Optional Dual Wheels - Pull-Type	Yes	
Quick-hitch Ready	Yes	
Gearbox Warranty	6-year	

ROTARY CUTTERS | Offset Dual-spindle

Woods' rugged and powerful 50-series offset models are ideal for orchards, tree-lined fields and any setting with overhangs.

HYDRAULIC VARIABLE OFFSET

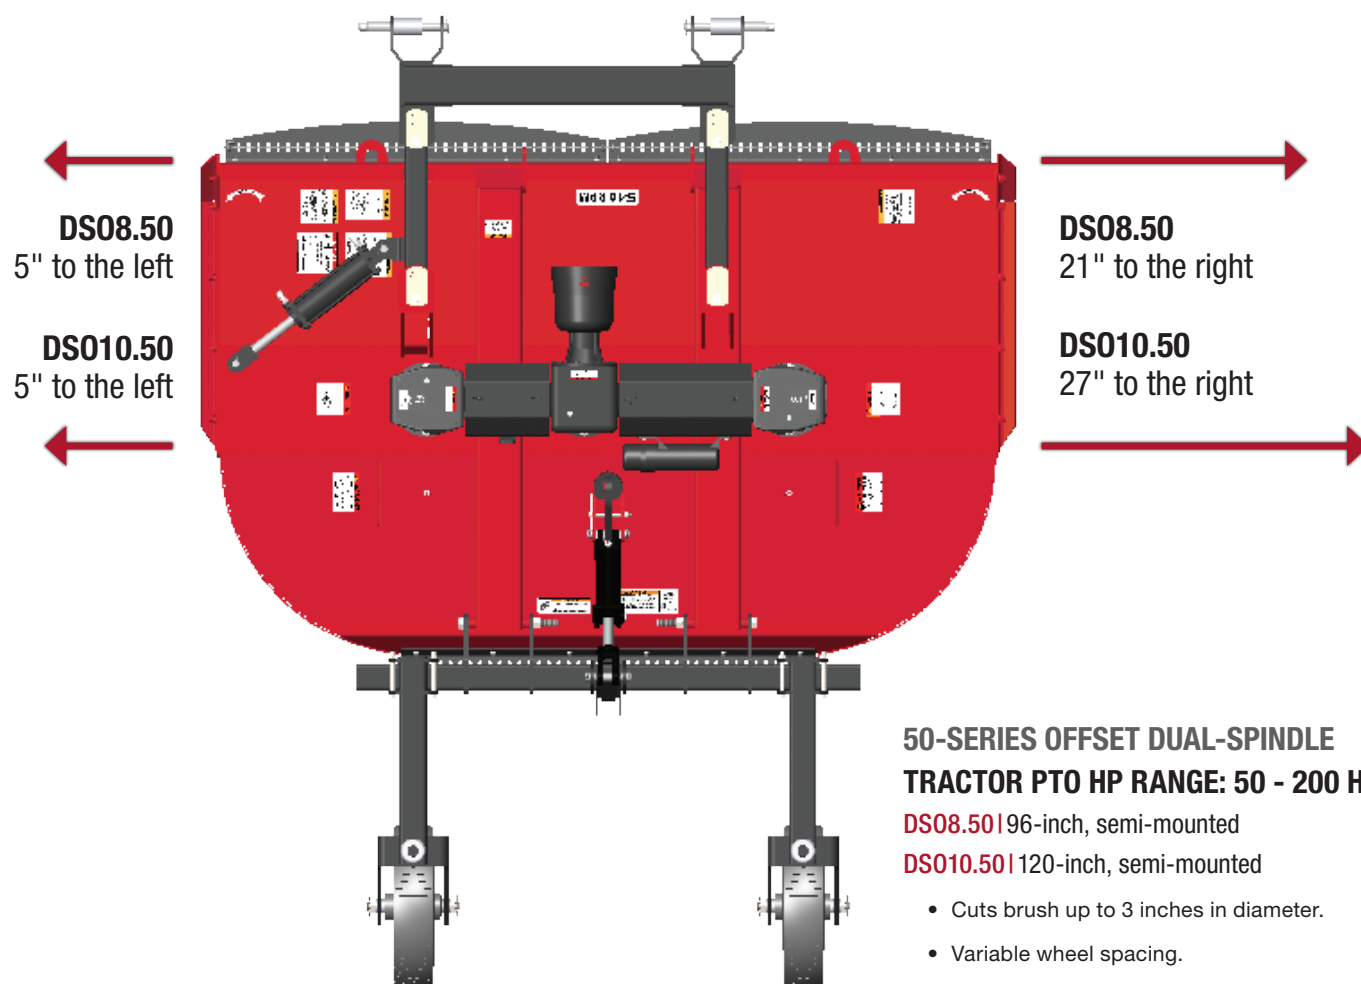

50-SERIES OFFSET DUAL-SPINDLE TRACTOR PTO HP RANGE: 50 - 200 HP

DS08.50 | 96-inch, semi-mounted

DS010.50 | 120-inch, semi-mounted

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- DS08.50 hydraulic variable offset 21 inches to the right or 5 inches left.
- DS010.50 hydraulic variable offset 27 inches to the right or 5 inches left.
- Advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals.

ROTARY CUTTERS | Offset Dual-spindle

Woods’ offset models reach far under canopies on either side of the tractor.



DS08.50
Shown with
chain shielding.

MODEL	DS08.50	DS010.50
Minimum Tractor PTO (HP)	Semi-mounted: 40	Semi-mounted: 50
Hitch Category/Type	CAT 2 or CAT 3 / clevis	
Hydraulic Variable Offset (in)	21 to the right, 5 to the left	27 to the right, 5 to the left
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2 - 12	
Cutting Capacity (in)	3	
Gearbox Rating (HP)	205 center, 160 blade spindle	205 splitter; 160 blade spindle
Gearbox Warranty	6-year	
Blade Tip Speed (fpm)	14,886 at 540 rpm	15,974 at 540 rpm
Deck Side Depth (in)	13	
Deck Thickness (ga l in)	10 l .135	
Overall Width (in)	103	127
Overall Length (in)	122	128
Approximate Weight (lbs)	2,335	2,510
Blade Dimensions (in)	.5 x 4	
Wheel Selection (in)	21 laminated	

FINISH MOWERS



DISCOVER THE PREMIUM CUT QUALITY THAT MAKES WOODS THE UNDISPUTED LEADER IN FINISH MOWERS.

DESIGNED FOR SPEED

Woods finish mowers help you maintain a beautiful lawn in less time. You'll look forward to using and maintaining your equipment with features that focus on your drive to get more done.

- Our mower designs provide improved cut quality at higher moving speeds, enhancing productivity for less time on the job.
- Spring-loaded idler arms automatically maintain the correct tension on our strong custom-made belts, providing optimum run time.

PRECISION AND QUALITY

For those who demand a professionally groomed lawn, Woods high-performance finish mowers ensure a clean, crisp, manicured appearance year after year.

- The combination of a deep deck, baffling and unique rear discharge design ensures exceptional material distribution and gives you the premium results that make the Woods name synonymous with "cut quality".
- Manufactured exclusively to Woods' superior standards, heat-treated, alloy steel blades provide maximum performance and precision cutting in applications such as large lawns, parks and sporting fields.
- A convenient driveline holder and quick-hitch readiness from the factory make attachment to your tractor a breeze.



TKP72.40

Shown with optional chain shielding.

FINISH MOWERS | TurfKeeper™

TIME TO GET EVEN

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.



TURFKEEPER™

INTRODUCING THE NEW REAR-MOUNT FINISH MOWERS FROM WOODS, THE TURFKEEPER™, DESIGNED TO DELIVER OUTSTANDING CUT QUALITY AT A LOWER COST OF OWNERSHIP.



3-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.



1-YEAR SPINDLE WARRANTY

Lubed for life spindles with one year warranty provide ease of mind.



DRIVELINE HOLDER

Keep the drive out of the dirt, even when attaching.



EASY SHIELD REMOVAL

No tools needed to access belt sheaves, belt, spring-loaded idler.




CAST IRON SHEAVES

Better belt grip for extended belt life.



SERVICEABLE BELT IDLER

Replaceable idler post and bronze bushing.



OPTIONAL CHAIN SHIELDING

Helps prevent discharge of foreign objects.



OPTIONAL FRONT ROLLER

Anti-scalp protection for uneven terrain.



QUICK-HITCH READY

CAT 1 quick-hitch ready as shipped.

FINISH MOWERS | TurfKeeper™



3-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.


DRIVELINE HOLDER

Keep the drive out of the dirt, even when attaching.



1-YEAR SPINDLE WARRANTY

Lubed for life spindles with one year warranty provide ease of mind.

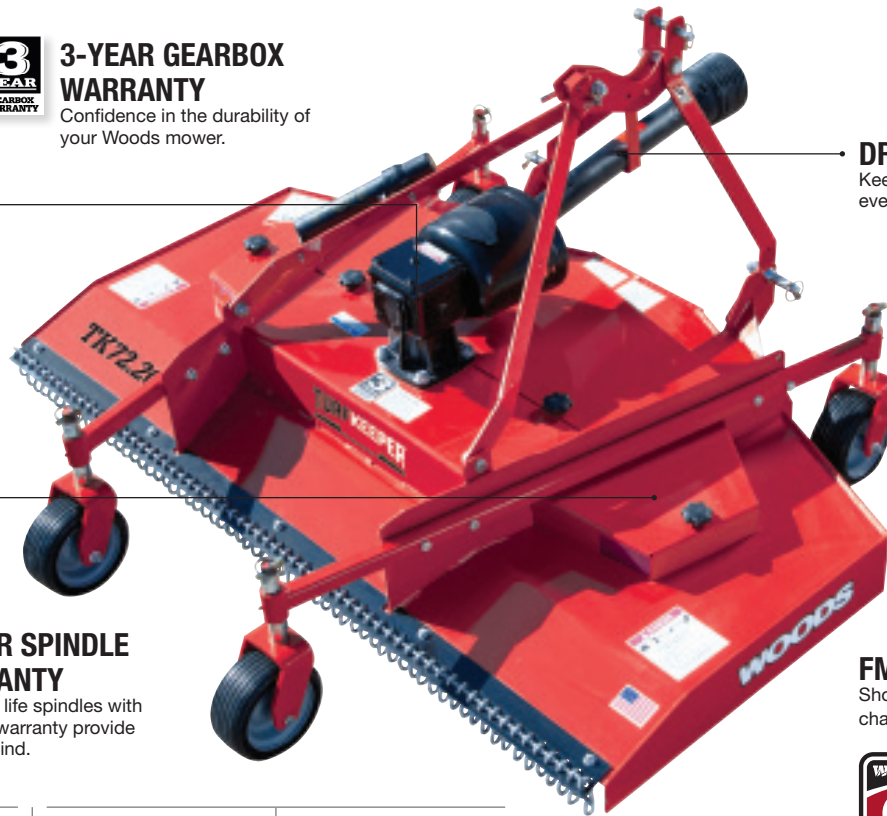

FM72.20

Shown with optional chain shielding.



MODEL	TK60.20	TK72.20
Tractor PTO Range (HP)	15 - 35	20 - 35
Hitch/Quick-hitch Ready	Limited CAT 1 & CAT 1 / yes	CAT 1 / yes
Cutting Width (in)	60	72
Weight (lbs)	480	540
Adjustable Cutting Height (in)	1.5 - 5	
Overall Width (in)	61	73
Deck Material Thickness (ga)	10	
Side skirt (ga in)	7 x 4.8 deep	
Gearbox Rating (HP)	35	
Blade Tip Speed (fpm)	17,900	18,000
Blade Overlap (in)	1.25	
Blade Spindles/Bearings	3 cast iron housings/ greasable ball bearings	
Spindle Maintenance	Lubed-for-life	
Tractor PTO Speed (rpm)	540	
Driveline Size	CAT 2	
Belt	B-section Kevlar®	
Belt Adjustment	Spring-loaded idler	
Cutting Area Shielding	Chain shielding (optional)	
Mower Warranty	1-year residential or 90 days commercial	
Gearbox Warranty (limited)	3-year homeowners, 1-year commercial	

TRACTOR PTO HP RANGE: 15 - 35 HP

TK60.20 | 60-inch cutting width

TK72.20 | 72-inch cutting width

- High-lift blades for best in class lifting and cutting of green material for evenness of cut.
- Parallel frame deck sides spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.
- Hitch: Limited CAT 1 (TK60.20) and CAT 1 (TK60.20 & TK72.20)

* NOTE: All TurfKeeper™ finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

FINISH MOWERS | TurfKeeper Pro™

TIME TO GET EVEN LIKE A PRO

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.



TURFKEEPER
PRO

TURFKEEPER PRO™ IS PACKED WITH FEATURES INCLUDING A DEEP HIGH-GRADE STEEL DECK, PREMIUM CASTER WHEELS, AND HEAVY-DUTY CONSTRUCTION TO MEET THE DEMANDS OF EVEN THE TOUGHEST COMMERCIAL APPLICATIONS.

Re-designed under deck baffling, a floating lower hitch, high-lift blades, and parallel side frames create an extremely even cut and even distribution of cut material...even when mowing at higher speeds. For ease of attachment, TurfKeeper Pro comes with a convenient driveline holder and is quick-hitch ready from the factory, without the need for additional hardware.

Combine all these great features with our 6-year gearbox warranty and 3-year spindle warranty, and you'll have complete confidence that the TurfKeeper Pro is one of the most rugged, best performing, and easiest to use finish mowers available.



6-YEAR GEARBOX WARRANTY
Confidence in the durability of your Woods mower.



3-YEAR SPINDLE WARRANTY
Ductile iron blade spindles with triple ball bearings and three-year warranty.




DRIVELINE HOLDER
Keep the drive out of the dirt, even when attaching.




EASY SHIELD REMOVAL
No tools needed to access belt sheaves, belt, spring-loaded idler.



CAST-IRON SHEAVES
Better belt grip for extended belt life.



SPRING-LOADED BELT TENSIONER
Replaceable ball bearing pivot for smooth operation.



OPTIONAL CHAIN SHIELDING
Helps prevent discharge of foreign objects.



OPTIONAL FRONT ROLLER
Anti-scalp protection for uneven terrain.



QUICK-HITCH READY
CAT 1 quick-hitch ready at purchase.



FINISH MOWERS | TurfKeeper Pro™

TRACTOR PTO HP RANGE: 15 - 50 HP

TKP60.40 | 60-inch cutting width

TKP72.40 | 72-inch cutting width

TKP84.40 | 84-inch cutting width

- Heavy duty construction provides maximum durability.
- Strong, 7 gauge steel deck and a powerful 60 hp gearbox.
- Uniquely designed for best-in-class cut quality.
- Floating lower hitch helps to follow ground contours for a smooth, even cut.
- Easy shield removal-no tools necessary.
- Deep deck and high blade tip speeds help you get the job done faster.
- Optional chain shielding attaches and detaches easily.
- Ideal for mowing large lawns, sports fields and parks.
- Superior baffle design distributes material more evenly.



EASE OF ATTACHMENT

Quick-hitch ready from the factory for ease of attachment.



DURABILITY

Premium, solid rubber caster wheels for performance and durability.

TKP72.40

Shown with optional chain shielding.

TURFKEEPER PRO DELIVERS BEST-IN-CLASS CUT QUALITY AT A LOWER COST OF OWNERSHIP.
IT'S TIME TO GET EVEN WITH YOUR GRASS - LIKE A PRO!

MODEL	TKP60.40	TKP72.40	TKP84.40
Tractor PTO Range (HP)	15 - 50	20 - 50	25 - 50
Product Weight (lbs)	617	686	790
Shipping Weight (lbs)	710	779	898
Hitch	CAT 1 & Ltd CAT 1	CAT 1	
Quick-hitch Ready	Yes		
Floating Lower Hitch	Yes		
Cutting Width (in)	60	72	84
Overall Width (in)	61	73	85
Adjustable Cut Height (in)	1.5 - 5.0		
Gearbox Rating (HP)	60		
Driveline Category	CAT 3		
Spindle Housing	Ductile iron		
Spindle Bearings	Triple ball bearings		
Greasable Spindle	Yes		
Spindle Sheave Type	Cast-iron		
Belt	B-section Aramid		
Belt Adjustment	Spring-loaded w/ bearing pivot		
Blade Size (in)	1/4 x 2-1/2 x 21	1/4 x 2-1/2 x 25	5/16 x 2-1/2 x 29
Blade Overlap (in)	1.5		
Blade Tip Speed (fpm)	18,000	18,100	
Deck Thickness (ga)	7		
Deck Depth (in)	5.38		
Caster Wheels (in)	4 x 10 solid		

FINISH MOWERS | RD990X

SIX-YEAR GEARBOX WARRANTY

With twice the oil capacity of many competitors and an improved breather system that maintains oil lubrication of gears, RD990X gearboxes carry a 6-year limited warranty to ensure years of worry-free performance.



TAPERED ROLLER BEARINGS

Tapered roller bearings in caster wheels provide superior performance and longevity in rough conditions.



RD990X
Shown with standard chain shielding.

REPLACEABLE SIDE SKIDS

Replaceable side skids attach to heavy side frames for durability and long life.

MODEL	RD990X
Tractor PTO Range (HP)	45 - 75
Hitch/Quick-hitch Ready	CAT 1 & CAT 2/yes
Cutting Width (in)	90
Weight (in)	1,333
Adjustable Cutting Height (in)	1.5-7
Overall Width (in)	97
Deck Material Thickness (ga)	7
Side Skirt (in)	.31 x 8.5 with skid shoes
Gearbox Rating (HP)	75
Blade Tip Speed (fpm)	17,000
Blade Overlap (in)	2
Blade Spindles/Bearings	3 cast iron housings / greasable tapered roller bearings
Tractor PTO Speed (rpm)	540
Driveline Size	CAT 4
Belt	Powerband w/double B-section
Belt Adjustment	Spring-loaded idler
Cutting Area Shielding	Chain shielding
Mower Warranty	1-year
Gearbox Warranty (limited)	6-year
Spindle Warranty (limited)	3-year

TRACTOR PTO HP RANGE: 45 - 75 HP

RD990X | 90-inch cutting width

The Woods RD990X rear discharge finish mower is tough yet versatile enough to move from rough, weedy farmland to commercial lawns and landscapes.

- Three-point hitch: CAT 1 and CAT 2.
- Blade tip speed: 17,000 fpm.
- Takes down grass and light weeds, and leaves a high grade finish cut behind.
- Features a patented Quick-change blade system, an extra strong double B-section belt, and anti-wrap bars that prevent damage caused by material wrapped around lower spindle.
- Deep deck, swinging blades and stump jumper are ideal for rough conditions.
- Floating lower hitch points allow the mower to follow uneven terrain.

NEW FINISH MOWERS | **Turf Batwing®**

2022

Our flexible wing finish mowers deliver Woods proven cutting deck in a three-gang configuration.

TURF BATWING™

TRIPLE-DECK FLEXWING FINISH MOWERS



***THE TURF BATWING™ INCLUDES THE CUTTING TECHNOLOGY FROM THE #1 RATED TURFKEEPER PRO™, RATED BEST IN CUT QUALITY IN INDEPENDENT TESTING.**

For more information visit woodsequipment.com

Introducing the newly redesigned Turf Batwing®, our triple-deck, rear-discharge, flexwing finish mower for large lawns, estates and commercial applications. The Turf Batwing delivers the best-in-class cut quality at a lower cost of ownership. That's how Woods helps you Get After It.

ESTATE MODEL

The Estate model offers a 12-ft cutting width and Woods' latest innovative precision cutting technology that beautifies your lawn in less time, leaving that well-manicured look.

COMMERCIAL MODELS

Commercial models are available in 12-ft, 15-ft and 17-ft cutting widths and are engineered with proven components for best-in-class cut quality* and extreme durability. Tackle challenging terrains and overcome demanding commercial applications.



TBW17.40

Shown with optional chain shielding and anti-scalp rollers.

FINISH MOWERS | Turf Batwing®

TURF BATWING™

ESTATE MODEL

TRACTOR PTO HP RANGE: 25 - 60 HP

TBW12.20 12-foot cutting width

- High-lift blades for best-in-class lifting and cutting of green material for evenness of cut.
- Parallel deck side frames spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.
- Trust the Woods legacy for durable, high-quality cutting equipment for all your mowing needs.

MODEL	TBW12.20
Tractor PTO (HP)	25 - 60
Shipping Weight (lbs)	2,005
Hitch	CAT 2 drawbar
Cut Width (in)	144
Cut Height (in)	1.5 - 4.5
Overall Width (in)	147
Max. Overall Length (in)	141
Transport Tongue Wt. (lbs)	384
Transport Width (in)	91
Transport Length (in)	135
Transport Height (in)	71.5
Splitter Gearbox (HP)	100
Deck Gearbox (HP)	30
Blade Tip Speed (fpm)	18,000
Drive Type	Gearbox over v-belt
Input Driveline	CAT 3 (CV)
Wing Drivelines	CAT 3
Transport Tires (in)	(2) 20.5 x 8-10
Caster Wheels (in)	(10) 8 x 3.5 solid
Trailer Frame Construction (in)	4.0 x 4.0 x .25 sq tube
Deck Thickness (ga)	10
Blade Spindles	(9) ductile iron, lubed-for-life
Blade Overlap (in)	1.25
Blade Dimensions (in)	(6) .25 x 2.5 x 17.0, (3) .25 x 2.5 x 20.8
Hydraulic Remotes Required	1



TBW12.20

Shown in transport mode.



WOODS' LATEST INNOVATIVE PRECISION CUTTING TECHNOLOGY BEAUTIFIES YOUR LAWN IN LESS TIME, LEAVING THAT WELL-MANICURED LOOK.



TBW12.20

Shown with optional chain shielding, front and rear anti-scalping rollers and light kit.



3-YEAR GEARBOX WARRANTY
Confidence in the durability of your Woods mower.




1-YEAR SPINDLE WARRANTY
Ductile iron blade spindles are lubed-for-life.



HYDRAULIC CYLINDERS
Rugged, single-acting hydraulic cylinders fold the mower for transport.



EASY SHIELD REMOVAL
No tools needed to access belt sheaves, belt or spring-loaded idler.



TRANSPORT LOCK QUICK RELEASE
Easily pull the rope to release transport lock.



CAST-IRON SHEAVES
Better belt grip for extended belt life.



SPRING-LOADED BELT TENSIONER
Replaceable idler post and bronze bushing.



OPTIONAL FRONT AND REAR ROLLERS
Anti-scalp protection for uneven terrain.



OPTIONAL CHAIN SHIELDING
Added protection to further reduce the risk of thrown objects.

FINISH MOWERS | Turf Batwing®

TURF BATWING™

COMMERCIAL MODELS

TRACTOR PTO HP RANGE: 30 - 80 HP

TBW12.40 | 12-foot cutting width

TBW15.40 | 15-foot cutting width

TBW17.40 | 17-foot cutting width

With its unique deck design and heavy duty steel construction, the new commercial Turf Batwing finish mower line combines unsurpassed cut quality and extreme durability. This rugged workhorse is capable of withstanding 2,000 hours of continuous runtime and features premium caster wheels to tackle uneven terrain. What's more, its unique high-lift blades and baffling design produce unrivaled cut quality*, making it the best choice when you mean business on your job.

COMMERCIAL GRADE.
FINISH CUT.
NO COMPROMISES.

TBW15.40

Shown with optional chain shielding, front and rear anti-scalping rollers and light kit.



MODEL	TBW12.40	TBW15.40	TBW17.40
Tractor PTO (HP)	30 - 80	35 - 80	40 - 80
Hitch	CAT 1, drawbar	CAT 2, drawbar	
Hitch Adjustment	Floating clevis, multi-position		
Cut Width (in)	144	180	204
Cut Height (in)	1.5 - 5.5		
Wing Deck Cut Width (in)	48	60	72
Center Deck Cut Width (in)	60	72	72
Deck Overlap (in)	6.0		
Overall Width (in)	145	183	205
Transport Width (in)	88	97	101
Max. Overall Length (in)	171	182	
Transport Length (in)	167	176	
Splitter Gearbox (HP)	100		
Blade Tip Speed (fpm)	18,000	18,100	
Drive Type	Gearbox over v-belt		
Input Driveline	CAT 4 CV (const. vel.)		
Wing Drivelines	CAT 3		
Transport Tires (in)	(2) 20.5 x 8-10		
Caster Wheel Bearings	Tapered roller bearings		
Caster Wheels (in)	(10) 15 x 6-6 pneumatic	(10) 18 x 9.5-8 pneumatic	
Wing Deck Lift Cylinders	3.0 x 10 single-acting		
Center Deck Lift Cylinders	3.0 x 8 single-acting		
Trailer Frame Construction	4.0 x 4.0 x .25 sq tube		
Deck Thickness (ga)	7		
Blade Spindles	(9) ductile iron		
Blade Spindle Bearings	Triple ball bearings		
Blade Dimensions (in)	(6) .25 x 2.5 x 17 (3) .25 x 2.5 x 21	(6) .25 x 2.5 x 21 (3) .25 x 2.5 x 25	(9) .25 x 2.5 x 25



6-YEAR GEARBOX WARRANTY
The industry's most comprehensive warranty covers both the gearbox and seals.



3-YEAR SPINDLE WARRANTY
Ductile iron blade spindles with triple ball bearings.



MORE EVEN CUT
Unique baffling and blade design lifts grass more efficiently for a better cut.



HANDLE RUGGED TERRAIN
Repositioned, extra-large casters better handle rugged terrain.



WIDER DISCHARGE AREA
Wider discharge area allows clippings to flow through effortlessly, without clogging.



IMPROVED BELT DRIVE DESIGN
Handles more horsepower than ever before to maintain superior cut quality at higher speeds.



EASY SHIELD REMOVAL
No tools needed to access belt sheaves, belt and spring-loaded idler.



OPTIONAL FRONT AND REAR ROLLERS
Anti-scalp protection for uneven terrain.



OPTIONAL CHAIN SHIELDING
Helps prevent discharge of foreign objects.

SEEDERS



SEEDERS

Woods' seeders give you the flexibility to handle primary seeding, over-seeding, and can even plant up to three types of seed in one pass. You choose the combination of seed boxes that fits your application. That means efficient, one-pass planting that maximizes efficiency and productivity.

MAXIMIZE PLANTING EFFICIENCY AND PRODUCTIVITY WITH WOODS' SEEDERS.

**WHAT CAN WOODS SEEDERS PLANT?
HERE IS A PARTIAL LIST ...**

COOL SEASON GRASS AND CEREAL GRAINS (LARGE SEEDS)

Annual Ryegrass
Barley
Buckwheat
Buffalo Grass
Chufa
Corn (small rounds)
Fescue
Kentucky Bluegrass Blends
Kidney Beans
Lablab
Lima Beans
Oats
Orchardgrass
Peas
Perennial Ryegrass
Snow Peas
Sorghum
Soybeans
Sudan
Sugar Beets
Sunflower
Triticale
Wheat

LEGUME BOX (SMALL SEEDS)

Alfalfa
Bahai
Bermuda
Birdsfoot Trefoil
Black-eyed Susan
Brassica
Brown Top Millet
Carpet Grass
Centipede
Chicory
Clover
Fescue
Forbes
Green Sprangletop
Kale
Kentucky Bluegrass
Kleingrass
Plains Bristlegrass
Radish
Rape
Side Oats Grama
Sudan
Sugar Beets
Switchgrass
Timothy
Turnip
Zoysia

NATIVE WARM SEASON GRASS BOX (FLUFFY, LIGHT-WEIGHT SEEDS)*

Big Bluestem
Brome
Canadian Wild Rye
Indian Grass
Little Bluestem
Sideoats Grama

* Precision Super Seeder only



SEEDERS | Food Plot Seeders



TRACTOR PTO HP RANGE: 25 - 65 HP

FPS48 | 49-inch **FPS60** | 60-inch

- Three-point hitch: CAT 1 & CAT 2.
- Working widths from 48–60 inches.
- Eight notched disc blades cut into the dirt.

TRACTOR PTO HP RANGE: 35 - 125 HP

FPS72 | 72-inch **FPS84** | 84-inch

- Three-point hitch: CAT 1 & CAT 2 (72-inch), CAT 2 (84-inch).
- Working widths from 72–84 inches.
- Ten notched disc blades prepare the seedbed.

FPS72

Shown with optional mud scrapers.

MODEL	FPS48	FPS60	FPS72	FPS84
Tractor Engine Range (HP)	25 - 45	30 - 65	35 - 85	40 - 125
Tractor Hitch	CAT 1 & CAT 2			CAT 2
Working Width (in)	49	60	72	84
Weight - Standard Configuration* (lbs)	821	899	1,196	1,320
Weight - Fully Configured** (lbs)	1,084	1,222	1,578	1,762
Drive Type	Ground			
Number of Seed Boxes Available	3			
Seed Box Ratio	1-speed			
Seed Cups (7" spacing)	7	8	10	12
Row Units	Standard			
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Disc Blades (in)	(8) 16 notched		(10) 18 notched	
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)			
Calibration Tray & Crank Handle	Standard			
Mud Scrapers & Frame Platform	Optional			
ASABE Quick-hitch Ready	Yes			

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat.
- A trailing cultipacker firms the seedbed for perfect seed-to-soil contact that's ready to trap moisture for germination.
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass.

* Includes spiked drive roller, disc blades, cool season seed box, and row units.

** Includes cultipacker drive roller, notched disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.

SEEDERS | Precision Super Seeders



PSS84

TRACTOR PTO HP RANGE: 25 - 45 HP

PSS48 | 49-inch **PSS60** | 60-inch

- Three-point hitch: CAT 1 & CAT 2.
- Working widths from 48–60 inches.
- Heat treated front roller spikes prepare the soil for planting.

TRACTOR PTO HP RANGE: 30 - 85 HP

PSS72 | 72-inch **PSS84** | 84-inch

- Three-point hitch: CAT 1 & CAT 2 (72-inch), CAT 2 (84-inch).
- Working widths from 72–84 inches.
- Heat treated front roller spikes are adjustable for primary over-seeding.

The Precision Super Seeder gives you the flexibility to handle primary seeding, over-seeding and applications such as native grasses and food plots. It's the most versatile seed box combination on the market.

- Three seed box options — cool season, warm season and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans.
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth — with models equipped with three seed boxes.
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required.

MODEL
Tractor Engine Range (HP)
Tractor Hitch
Working Width (in)
Weight - Standard Configuration* (lbs)
Weight - Hunting Edition Configuration** (lbs)
Drive Type
Number of Seed Boxes Available
Seed Metering
Seed Cups
Cool Season Seed Box Capacity (bushel)
Native Warm Season Seed Box Capacity (bushel)
Legume Seed Box Capacity (bushel)
Front Roller Spikes (in)
ASABE Quick-hitch Ready

PSS48	PSS60	PSS72	PSS84
25 - 45	30 - 65	35 - 85	40 - 125
CAT 1 & CAT 2			CAT 2
49	60	72	84
779	861	1,132	1,249
1,044	1,222	1,565	1,761
Ground			
3			
Fluted and picker wheel			
7	8	10	12
4.00	5.00	6.00	7.00
5.00	6.25	7.50	8.75
1.00	1.25	1.50	1.75
(128) .5 x 1.75 carbide steel	(160) .5 x 1.75 carbide steel	(192) .5 x 1.75 carbide steel	(224) .5 x 1.75 carbide steel
Yes			

* Standard configuration consists of frame with spiked, ground drive roller, adjustable front spiked rollers and cool season seed box.

** Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker.

SEEDERS | Compact Super Seeders

The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination.

TRACTORS

CSS48: 15 HP - 35 HP

CSS60: 20 HP - 45 HP

ATVS AND UTVS (4WH)

CSS48: minimum 350cc

CSS60: minimum 400cc




CHOOSE THE FEATURES THAT FIT YOUR PROJECT

Every model starts with a spiked drive roller and a cool season seed box.
Then, choose the front tool that will prepare your seed bed.



ADD ONE, OR ALL, OF THESE OPTIONS TO IMPROVE YOUR PRODUCTIVITY AND VERSATILITY:



Spiked roller with adjustable angles that will penetrate thatch and aerate lawns. Or, angle it to break up the surface and remove stands of turf.

OR



Adjustable disc blades that will cut into and work the soil. Easily adjust the blade angles to till more aggressively depending upon soil conditions.

PLUS ANY OR ALL OF THESE:

+ Add a legume seed box and now you can plant two seeds at different depths in one pass.

+ Mud scrapers help keep blades free from dirt clods, mud and clay.

+ An electric tow kit for ATVs and UTVs for tractors that make it easy to transport.

PLUS, A FAST/SLOW CHAIN DRIVE, ROAD LIGHTS, SEED STOP PLATES – THE OPTIONS OFFER YOU NEARLY ENDLESS WAYS TO CUSTOMIZE YOUR WOODS COMPACT SUPER SEEDER.

SEEDERS | Compact Super Seeders

REACH ONCE UNREACHABLE PLOTS

If you prefer to work the land on an ATV or UTV instead of a tractor, the Woods Compact Super Seeder is still your machine. Full-featured like our larger seeders, with the same rugged steel body and parts — yet, lightweight so that you can easily lift, tow, till and sow with an ATV or UTV. With the optional electric tow kit you don't even need to leave your seat to raise and lower the seeder.

Woods' superior design enables you to maneuver into tight spaces and reach once unreachable places. Go ahead, plant a little food plot in the woods. You can do it with the Woods Compact Super Seeders.



TRACTOR HP RANGE: 15 - 35 HP

CSS48 | 48-inch

- Three-point hitch: CAT 1 / Limited CAT 1.
- Working width 48 inches.
- ATV/UTV minimum 350cc.

TRACTOR HP RANGE: 20 - 45 HP

CSS60 | 60-inch

- Three-point hitch: CAT 1 / Limited CAT 1.
- Working width 60 inches.
- ATV/UTV minimum 400cc.



MODEL
Tractor Engine (HP)
Tractor Hitch
ATV/UTV Engine Size
Working Width (in)
Overall Width (in)
Weight with Seed, Depending upon Configuration (lbs)
Drive Type
Number of Seed Boxes Available
Seed Metering
Seed Box Ratio
Cool Season Seed Box with Agitator
Cool Season Seed Box Capacity
Legume Seed Box
Legume Seed Box Capacity
Front Tool Choices (in)
Calibration Tray
Crank Handle
Spring-loaded Trailing Cultipacker
Speed Ranges
Options
ASABE Quick-hitch

CSS48	CSS60
15 - 35	20 - 45
CAT 1/Limited CAT 1	
Minimum 350cc	Minimum 400cc
48	60
57	69
395 - 679	487 - 810
Ground-driven spiked roller	
1 or 2	
6 seed cups	8 seed cups
5.1:1 or 14.4:1	5.1:1 or 14.4:1
Standard	
1 bushel	1.25 bushel
Optional	
1 bushel	1.25 bushel
(6) 16 notched disc blade or spiked roller	(8) 16 notched disc blade or spiked roller
Standard	
Standard	
Optional	
Turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)	
Fast/slow chain drive, Quick-hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit	
Add hitch pin bushings to make CAT 1 quick-hitch ready	

SEEDERS | Compact Super Seeders


**GOOD THINGS...
PRECISION METERING,
MANEUVERABILITY,
VERSATILITY,
PRODUCTIVITY,
DURABILITY...
COME IN COMPACT
PACKAGES
FROM WOODS.**

Ideal for small-scale planting, such as food plots, lawns, gardens, wildflower meadows, waterways and roadways. Widths 48 or 60 inches and lighter weight so you can maneuver into formerly unreachable areas.

ADDITIONAL FEATURES STANDARD ON BOTH MODELS

- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. **WOODS EXCLUSIVE**
- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.
- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. **WOODS EXCLUSIVE**

PRECISION METERING – Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) meters.

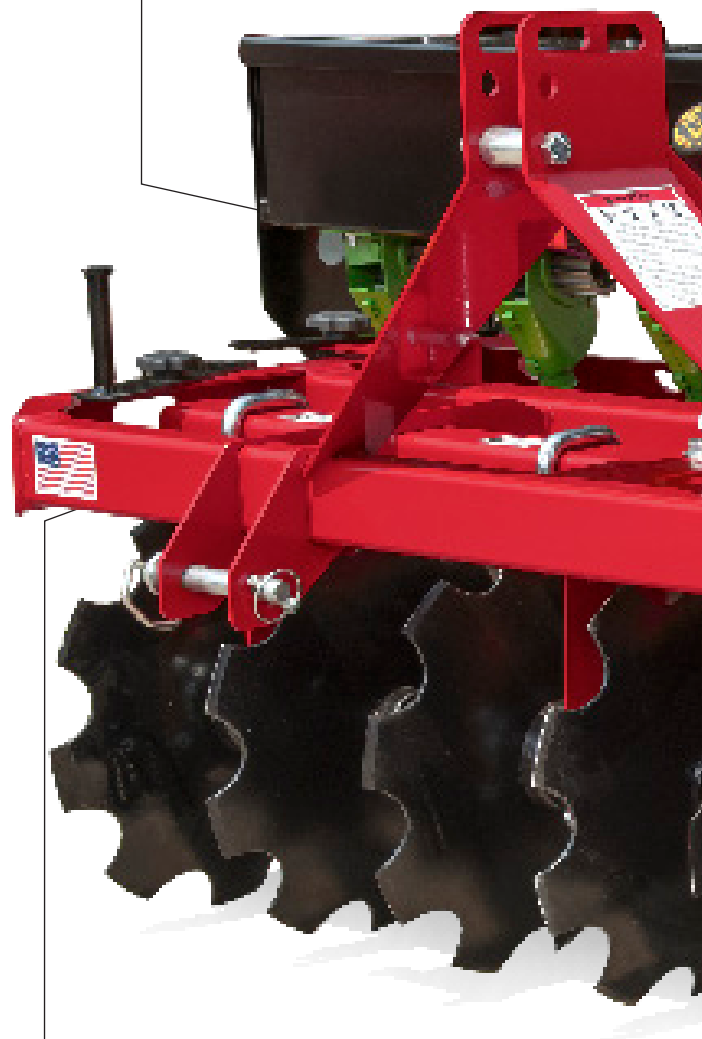

MANEUVERABILITY – Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter.

SEEDERS | Compact Super Seeders

→ **VERSATILITY** – Handle a wide range of seeds from Black-eyed Susans to corn. See our planting guide.



**WOODS
EXCLUSIVE**

→ **PRODUCTIVITY** – Simultaneously plant two seed types at two different depths in one pass.

→ **DURABILITY** – Expect years of work from a rugged, Grade 80 steel body.

TILLAGE EQUIPMENT



WOODS TILLAGE EQUIPMENT

When you're ready to dig in and work the soil, turn to Woods. We bring a well-earned reputation for durability, reliability and innovation to our line of tillage equipment. Woods rotary tillers and disc harrows are designed for medium- and heavy-duty projects on homes, small farms, orchards or nurseries and for anyone living the country life. Choose from a range of widths depending upon your tasks.

THERE'S NOTHING LIKE THE SMELL OF FRESH TURNED DIRT.




Woods' line of rotary tillers couples the best design features with outstanding performance. In fact, our 30- and 40-series rotary tillers received the 2017 ASABE award for Outstanding Innovations in Product or Systems Technology.

When you're ready to dig in and work the soil, turn to Woods.

CHOOSE FROM FORWARD AND REVERSE ROTATION

In 44- to 74-inch widths, Woods' forward rotation rotary tillers are ideal for moist, wet, rocky, sandy or loose soil conditions. Reverse rotation tillers deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt.

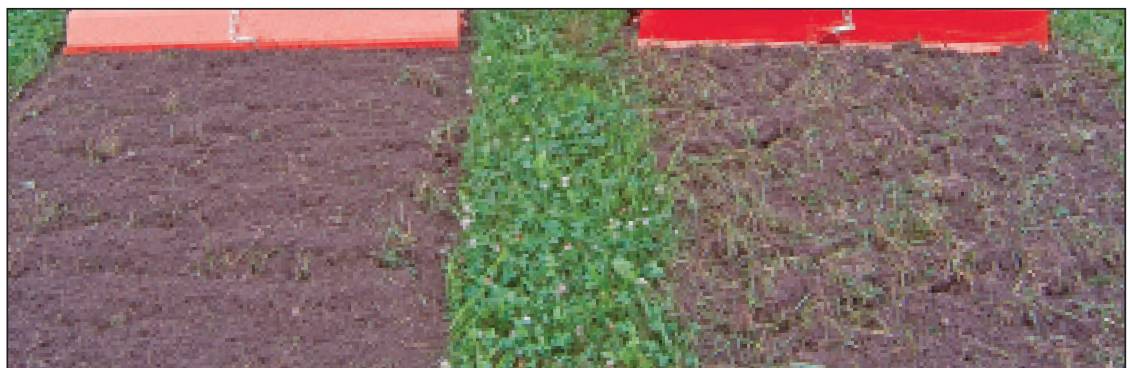

REVERSE

FORWARD

TILLAGE EQUIPMENT | Rotary Tillers



Woods’ line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our tillers will handle your landscaping and gardening projects with ease.

RT60.40

TRACTOR PTO HP RANGE: 12 - 35 HP
30-SERIES ROTARY TILLERS

- RT42.30 | 41-inch
- RT48.30/RTR48.30 | 47-inch

TRACTOR PTO HP RANGE: 18 - 50 HP
40-SERIES ROTARY TILLERS

- RT60.40/RTR60.40 | 59-inch
- RT72.40/RTR72.40 | 71-inch
- Innovative double-flange blade support.
- Gear-driven side drive – less maintenance than chain-driven units.
- 3-year warranty on input gearbox (includes seals).



MODEL	RT42.30	RT48.30/RTR48.30	RT60.40/RTR60.40	RT72.40/RTR72.40
Tractor PTO Range (HP)	12 - 30	15 - 35	18 - 40	20 - 50
Tractor Hitch	Limited CAT 1 & CAT 1		CAT 1	
Tilling Width (in)	41	47	59	71
Overall Width (in)	51	57	69	81
Weight (lbs)	478	502 / 508	570 / 578	621 / 630
Maximum Tilling Depth (in)	7	7	7	7
Drive Type	Gearbox			
Standard Number of Tines/Number of Flanges	20/5	24/6	28/7	36/9
Number of Tines per Flange	4 C-type			
Rotor Shaft (rpm)	210			
PTO Driveline Protection	Slip clutch			
Tractor PTO Speed (rpm)	540			
Gearbox Housing	Heavy-duty cast iron			
Gearbox Drain Plug	Yes			
Quick-hitch Ready	Yes			



RT60.40

TILLAGE EQUIPMENT | Disc Harrows

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right disc harrow for your land. These rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.

TRACTOR PTO HP RANGE: UP TO 55 HP

DHS48 | 48-inch

DHS64 | 64-inch

DHS80 | 80-inch

- Optional mud scrapers that prevent clogging, increase productivity.
- Optional furrow fillers (DHS64, DHS80).



DHS64
Notched
Shown with
optional mud
scrapers.

MODEL	DHS48	DHS64	DHS80
Tractor Engine (HP)	Up to 35	25 - 45	35 - 55
Tractor Hitch	CAT 1, Limited CAT 1	CAT 1	
Width (in)	48	64	80
Weight (lbs) (Depends Upon Blade Type)	390	508	590
Disc Blade Type	Notched	Notched; or combination smooth and notched	
Average Weight per Blade (lbs)	33	36	33
Disc Diameter (in) / Quantity	16 / 12	18 / 14	18 / 18
Disc Spacing (in)	7.5 front and rear	9 front, 7.5 rear	
Gang Axle Diameter (in)	1 square		
Frame Construction (in)	3 x 3 tube and angle		3 x 3 tube and channel
Quick-hitch Ready	Yes		


TILLAGE EQUIPMENT | Disc Harrows

TRACTOR PTO HP RANGE: 45 - 85 HP

DHM80 | 80-inch

DHM96 | 96-inch

- Optional furrow fillers to reduce end ridges.
- Optional rear drawbar for towing equipment.
- Optional mud scrapers that prevent clogging, increase productivity.

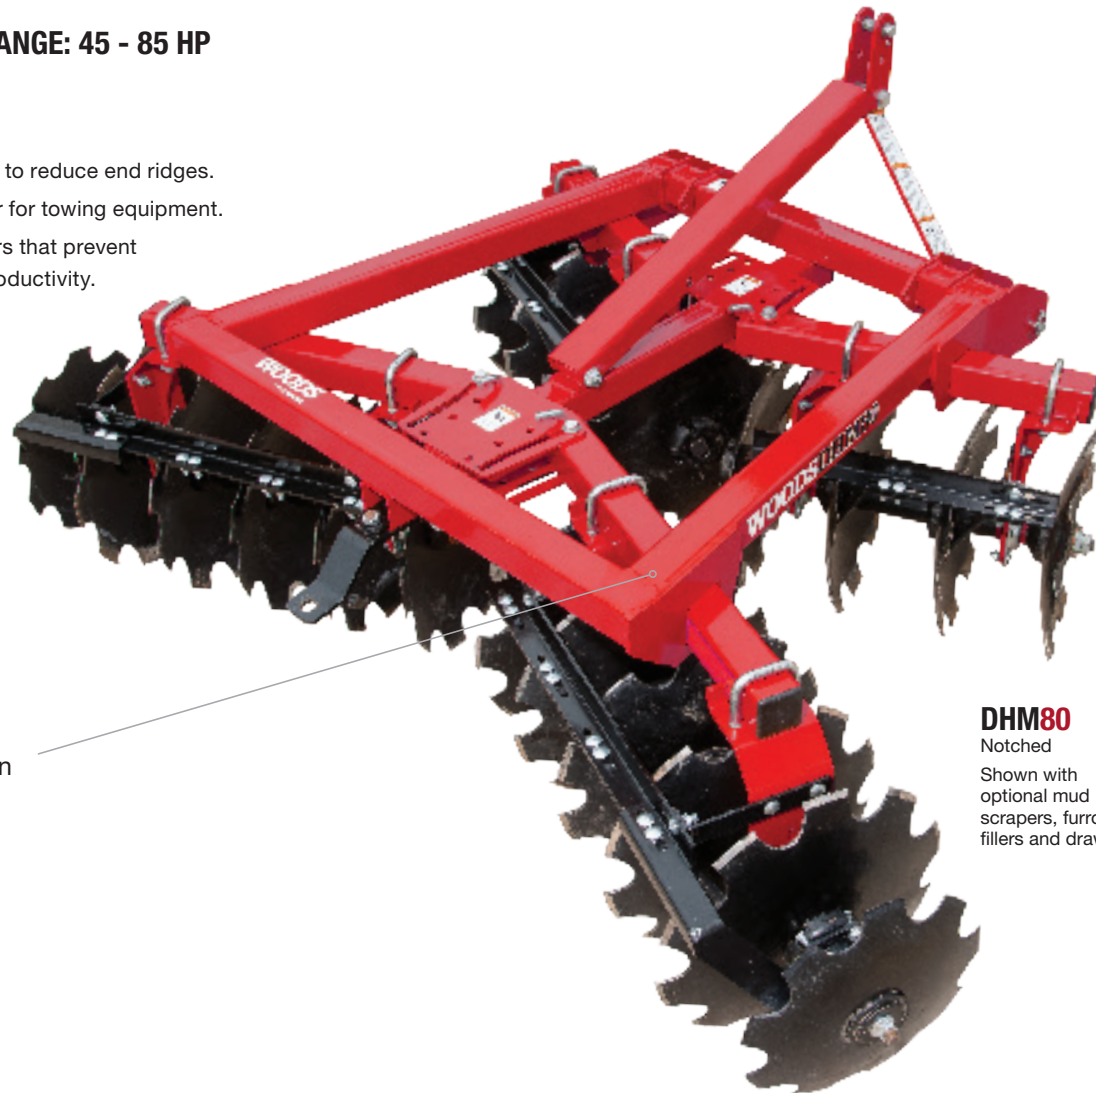

TAPERED FRAME

Tapered frame design balances individual disc gangs for easy adjustments.

DHM80

Notched
Shown with optional mud scrapers, furrow fillers and drawbar.

MODEL	DHM80	DHM96
Tractor Engine (HP)	45 - 75	55 - 85
Tractor Hitch	CAT 1 & CAT 2	
Width (in)	80	96
Weight (lbs) (Depends Upon Blade Type)	845	960
Disc Blade Type	Notched; or combination smooth and notched	
Average Weight per Blade (lbs)	47	44
Disc Diameter (in) / Quantity	20 / 18	20 / 22
Disc Spacing (in)	9 front, 7.5 rear	
Gang Axle Diameter (in)	1 1/8 square	
Frame Construction (in)	3 x 3 tube	
Quick-hitch Ready	Yes	

DIRT WORKING



WOODS DIRT WORKING EQUIPMENT

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Pull it all together and you've got Woods Power — power to be more productive.

A FULL LINE OF TOOLS TO TACKLE A VARIETY OF YARD AND GARDEN PROJECTS.

BOX SCRAPERS: Designed with exceptional strength and versatility to move large amounts of material.

GRADING SCRAPERS: Ideal for leveling dirt and gravel in driveways, lawns and fields.

REAR BLADES: Move dirt, grade driveways and clear snow.

LANDSCAPE RAKES: Great for clean-up jobs and fine raking.

POST HOLE DIGGERS: Power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

Quick Hitch

Woods TQH1 quick-hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket.
- Seven-eighths-inch mounting pins and adapter bushings.
- Lower arms lock automatically.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch readiness.



MODEL	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width (in)	27.25	
Approximate Weight (lbs)	75	
Mounting Pin Diameter (in)	.875	
Adapter Bushing Diameter (in)	1.125	

DIRT WORKING | Box Scrapers

TRACTOR PTO HP RANGE: UP TO 45 HP

GBC48 | 48-inch **BSS54** | 54-inch
BSS60 | 60-inch **BSS65** | 65-inch
BSS72 | 72-inch

- Three-point hitch: Limited 1 and CAT 1.
- Designed for sub-compact and compact tractors.
- Hardened scarifier teeth with replaceable tips.
- Reversible/replaceable high-carbon cutting edges.



TRACTOR PTO HP RANGE: 40 - 65 HP

BSM72 | 72-inch
BSM84 | 84-inch

- Three-point hitch: CAT 1 and CAT 2.
- End plates: .5-inch– 33% heavier end plates than our BSS models.
- One-quarter-inch plate welded inside of end plates to increase life.
- Optional floating, hinged tailgate to provide maximum downforce on cutting edge.

BSS72

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine Range (HP)	Up to 25	Up to 45				40 - 65	
Tractor Hitch	Ltd CAT 1 & CAT 1	CAT 1				CAT 1 & CAT 2	
Working Width (in)	48	54	60	65	72	72	84
Capacity (cubic feet)	9	9.7	10.8	11.7	13	13	15.1
Approximate Weight (lbs)	285	486	514	528	551	680	750
Scarifier Depth (in)	0 - 1.5	0, 1.5 or 3 adjustable					
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	Fixed					Fixed, floating optional	
Cutting Edges	2						

DIRT WORKING | Grading Scrapers



GSS72P

Woods grading scrapers are ideal for leveling, whether you're filling potholes in gravel driveways or removing a soil berm after installing field tile.

- Heavy-duty mast plates create more downforce for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.



GSS54P

TRACTOR PTO HP RANGE: 15 - 45 HP

GSS54P | 53-inch

GSS60P | 59-inch

GSS72P | 71-inch



- Three-point hitch: Limited CAT 1 and CAT 1.
- Fourteen- and sixteen-inch box heights.

TRACTOR PTO HP RANGE: 30 - 65 HP

GSM84P | 83-inch

GSM96P | 95-inch

- Three-point hitch: CAT 1 and CAT 2.
- Sixteen-inch box height — one of the tallest in the industry.

MODEL
Tractor Engine Range (HP)
Hitch Category
Working Width (in)
Overall Width (in)
Overall Length (in)
Box Height (in)
Weight (lbs)
Number of Scarifiers
Reversible Cutting Edge (in)
Scarifier Adjustments
Skid Shoe Adjustment
Lower Hitch Design

GSS54P	GSS60P	GSS72P	GSM84P	GSM96P
15 - 30	20 - 45		30 - 65	
Ltd CAT 1 & CAT 1	CAT 1		CAT 1 & CAT 2	
53	59	71	83	95
58	64	76	88	100
42	46			
14	16			
419	553	655	754	802
4		5	6	
(2) 0.5 x 6				
-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5			
-0.75 to +0.75	-1.0 to +0.5			
Cleviss				

DIRT WORKING | Rear Blades

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Double-beveled, reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Optional skid shoes for depth control, and optional parking stand for easier attachment.



TRACTOR HP RANGE: 30 - 65 HP 50 - SERIES REAR BLADES

RB72.50 | 71-inch
RB84.50 | 83-inch
RB96.50 | 95-inch

- Seventeen-inch high, 1/4-inch thick moldboard.
- Double-beveled, reversible and hardened cutting edge for long life.
- Fully manual offers angle, offset and tilt adjustments.
- Optional end plates, skid shoes and hydraulic angle kit (includes relief valve).
- Convenient parking stand is standard.



RB72.50

DIRT WORKING | Rear Blades



RBS84P
Shown with optional
parking stand.

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P	RB72.50	RB84.50	RB96.50
Tractor Engine (HP)	Up to 30			20 - 45			30 - 65		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1			CAT 1 & CAT 2		
Working Width (in)	53	59	71	59	71	83	71	83	95
Moldboard Height (in)	12			15			17		
Moldboard Thickness (in)	0.182 (grade 80 steel)			0.25 (grade 80 steel)			0.25 (grade 80 steel)		
Weight (lbs)	134	142	156	268	288	308	455	475	495
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.375 x 6			0.5 x 6			0.5 x 6		
Angle Adjustments (degrees)	5 positions up to 30						7 positions up to 45 (mech or hyd)		
Offset Adjustments (in)	—	—	—	Up to 12 left or right			6, 12, 18 left or right		
Tilt Adjustments (degrees)	—	—	—	up to 15			5 positions up to 23		
End Plates	—	—	—	Optional			Optional		
Skid Shoes	Optional						Optional		
Parking Stand	Optional						Standard		
ASABE Quick-hitch Ready	Yes						Yes		

DIRT WORKING | Rear Blades



TRACTOR HP RANGE: 40 - 85 HP 60 - SERIES REAR BLADES

RB84.60 | 83-inch

RB96.60 | 95-inch

- Seventeen and a half-inch high, 5/16-inch thick moldboard.
- Double-beveled, reversible and hardened cutting edge for long life.
- Choose manual or hydraulic, featuring angle, offset and tilt adjustments.
- Optional end plates, skid shoes, tailwheel and selector valve.
- Convenient parking stand is standard.

TRACTOR HP RANGE: 50 - 100 HP

RB850 | 95-inch

RB1010 | 119-inch

- Three-point hitch: CAT 2 and CAT 3.
- Available as fully hydraulic, fully manual or combination cylinder options.
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset).
- Tough, dozer-type full box construction.

DIRT WORKING | Rear Blades




RB96.60
Shown with optional hydraulic adjustment and selector valve.

MODEL	RB84.60	RB96.60	RB850	RB1010
Tractor Engine (HP)	40 - 85		50 - 100	80 - 150
Tractor Hitch	CAT 1 & CAT 2		CAT 2	CAT 2 & CAT 3
Working Width (in)	83	95	95	119
Moldboard Height (in)	17.5		17	18
Moldboard Thickness (in)	0.313		0.313	0.25
Weight (lbs)	705	730	1,233	1,535
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.5 x 6		0.5 x 6	
Angle Adjustments (degrees)	Up to 45 (mech or hyd)		9 forward up to 60; 5 reverse up to 30 (mech or hyd)	Up to 60 (hyd)
Offset Adjustments (in)	Up to 20 (mech or hyd)		Up to 24 (mech or hyd)	Up to 33 (mech or hyd)
Tilt Adjustments (degrees)	Up to 23 (mech or hyd)		Up to 30 (mech or hyd)	Up to 28 (mech or hyd)
End Plates	Optional		Optional	—
Skid Shoes	Optional		Optional	—
Tailwheel	Optional		Optional	
Parking Stand	Standard		Standard	
ASABE Quick-hitch Ready	Yes		Yes	

DIRT WORKING | Landscape Rakes



WOODS LANDSCAPE RAKES ARE BUILT WITH RUGGED DURABILITY FOR TOUGH CLEAN-UP JOBS, AS WELL AS FINE RAKING FEATURES FOR LIGHT-DUTY LAWN CARE AND GENERAL MAINTENANCE.

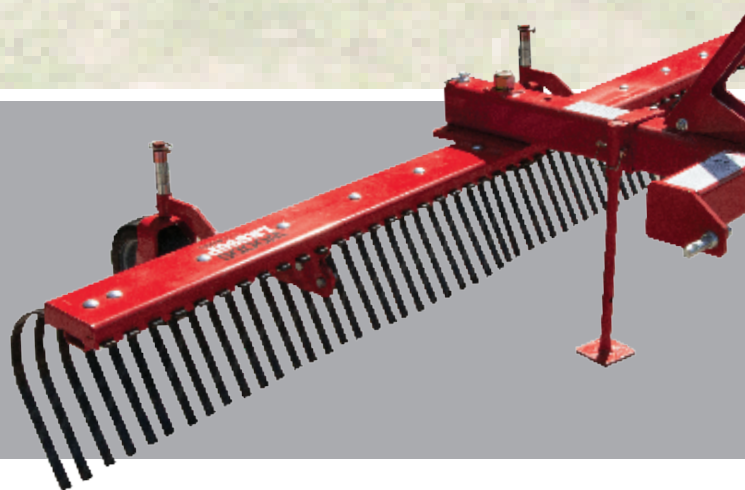

IDEAL FOR LAWN MAINTENANCE PROJECTS AND CLEARING DEBRIS AT CONSTRUCTION SITES.

TRACTOR PTO HP RANGE: UP TO 30 HP

LRS52 | 52-inch

LRS60 | 60-inch

LRS72 | 72-inch

TRACTOR PTO HP RANGE: 20 - 45 HP

LRS72P | 72-inch

LRS84P | 84-inch

LRS96P | 96-inch

- Heavy pivot components increase product longevity.
- Large, structural tine beam channel holds alloy spring steel tines firmly.
- Fast, easy and safe hook-ups with ASABE quick-hitch readiness.
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment.



MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine Range (HP)	Up to 30			20 - 45		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (in)	52	60	72	72	84	96
Approximate Weight (lbs)	156	168	186	264	288	311
Pivot Angle (degrees)	5 positions between 0 and 30, both forward and reverse					
Tines Dimensions (in)	5/16 x 1					
Tines Spacing (in)	1					
Gauge Wheels	Optional					
ASABE Quick-hitch Ready	Yes					
Parking Stand	Optional					

* NOTE: LRS72P, LRS84P and LRS96P are Premium Models

Shown with optional
parking stand.

DIRT WORKING | **Post Hole Diggers**



TRACTOR PTO HP RANGE: 14 - 95 HP

PD25.20 PD35.30 PD95.50

Ideal for landscapers, farmers and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.

- Heavy-duty welded construction and shear pin increase product longevity.
- Rugged gearbox with tapered roller bearings withstands shock load to handle the toughest projects.
- PTO driveline holder for easier set up.
- Six-year gearbox warranty.



**Three sizes in
three duty classes**



PD35.30

MODEL
Tractor PTO Range (HP)
Tractor Hitch
Approximate Weight (without auger) (lbs)
Drive Type
Tractor PTO Speed (rpm)
Shear Pin
Positioning Handle
Parking Stand
Auger (diameter x length) (in)
Auger Extension (in)

PD25.20	PD35.30	PD95.50
14 - 25	20 - 35	35 - 95
CAT 0, Ltd CAT 1, & CAT 1	CAT 1	CAT 1 & CAT 2
177	178	245
Gearbox		
540		
Standard		
Standard		
Standard		
6, 9, 12 x 36	6, 9, 12, x 48	6, 9, 12, 18, 24 x 48
Optional (12)		

GETTING THE JOB DONE

You can take on almost any project around the farm with your Massey Ferguson tractor and the right set of Woods implements. That perfect set of implements turns your tractor into a productivity powerhouse — ensuring you get the job done fast and get it done right.

When you chose your tractor, you probably looked at the type of work you needed to get done and chose a machine with the tractor horsepower to suit the size of your farm. In matching that tractor to implements, you simply need to know your tractor's engine and PTO horsepower and wheel width. In the specification charts throughout this catalog, the horsepower requirements and widths are listed for each implement. This way, you can make sure you have enough power to operate the implement and that it is wide enough to cover your wheel tracks. If you have questions, just ask your Massey Ferguson dealer.

But how do you pick the right set of implements with so many to choose from?

Let us help! Our product development team has hand selected the top five attachments that every acreage owner needs to get started.



ROTARY CUTTER

With large areas of brush and overgrown grass, a rotary cutter is a must-have. Cutters are available in many widths and duty-classes to suit your tractor and use. Rotary cutters are not able to adjust to changes in topography — meaning too low of a cut and you're scraping the soil — so, not suited for finish mowing.



BW15.50



FINISH MOWER

Many rural homesteads benefit from sweeping lawns and old pastures that have been transformed to park-like settings. If you enjoy this type of landscape, a rear-mounted finish mower is the perfect choice to manage ongoing maintenance. Finish mowers are available in a variety of widths to cover your wheel tracks and to cover as much ground as possible to get the job done quickly and efficiently.



TK72.20



ROTARY TILLER

Whether you need to control weeds in your garden, get a field ready for planting, or prepare ground for a food plot, a rotary tiller makes fast work of dirt work. Matching the tiller to your tractor horsepower is key: As a general rule, every foot of width on a tiller requires at least eight horsepower from your tractor.



REAR BLADE

A rear blade is great for grading a driveway, cleaning up debris, or removing snow. Choose a blade that's the same width as your tractor tires or slightly larger. Price dictates features. For example, more expensive blades have both vertical and horizontal axis rotation, allowing you to tip and tilt the blade to one side or the other. More economical blades allow minimal adjustments, if any.



POST HOLE DIGGER

Faced with jobs such as fencing property, planting trees, or building a deck, post hole diggers make your work a lot easier. The auger is often sold separately, offering a choice of sizes for various projects. Diggers work well in most soil conditions. However, for extremely hard soil, go with a heavy-duty digger.

RT60.40



QUICK HITCH

And don't forget a Quick Hitch System. The Quick Hitch allows you to easily connect and switch out implements. A Quick Hitch connects to your tractor's three-point hitch so that all you have to do is back up to the implement, lift up and you're ready to go to work. If you are using a PTO-driven implement such as a rotary cutter or tiller, you will need to manually attach the drive shaft.



IMPLEMENTS CATALOG

masseyferguson.us



MASSEY FERGUSON is a worldwide brand of AGCO.

AGCO, Your Agriculture Company, is a premier manufacturer of agricultural equipment, providing high-tech solutions for professional farmers feeding the world. The company is dedicated to delivering superior customer service, innovation and quality. AGCO products are distributed in more than 140 countries worldwide.

We proudly support:



woods® | Woods Equipment Company

2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

©2022 Woods Equipment Company. All rights reserved. WOODS, Woods Batwing®, BrushBull™, TurfKeeper™, TurfKeeper Pro™ and the Turf Batwing® logos are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.