



MF 3300

75 - 86 HP (55 - 63 kW)



MASSEY FERGUSON

BORN TO **FARM**

Good at everything, all the time

All the time by your side, for your production to go-ahead

The new Massey Ferguson 3300 features a brand-new AGCO Power electronic controlled engine, which makes your agricultural production simpler, more powerful and more reliable.

The Massey Ferguson 3300 is aimed at specialist farming operations, which includes fruit, nut and seed production. In addition, the MF 3300 is also ideal for horticultural applications.

The technology incorporated in the MF 3300 not only makes it highly affordable, but extremely competitive in terms of specification

The MF 3300 Series is available in an open station and cab model, and in 4WD



AGCO Power Engine

Efficient and powerful

The MF 3300 series of compact tractors are equipped with the 3-cylinder AGCO Power Engine. The engine features a common rail with an electronic control unit (ECU) to monitor all fuel and air parameters, which makes your agricultural production simpler, more powerful and more reliable. The ECU is coupled with a mini dashboard computer providing a real-time readout of hourly fuel consumption.

An engine memory function means that, at the press of a button, a preset engine revolution can be engaged, which translates into a more consistent application and less wear-and-tear on the drive-line, linkage and implements.

The engine has been optimized for lower emissions and fuel economy.

Mechanical synchromesh transmission

The right transmission for your needs

A straightforward Mechanical synchromesh transmission (12F x 4R) makes all work possible for the MF 3300.



Hydraulic System

A simple open-centre hydraulic system is powered by two gear pumps on the MF 3300 series. A 17 L/min pump provides power to linkage while a 42 L/min pump provides power to spool valves and internal services.

Two hydraulic remote valves provide a flow rate sum of up to 59L/min oil flow or 180 bar pressure, making it ideal for grounds care and other farm maintenance work.

Independent Power Take-off (IPTO)

All models are equipped with an independent hydraulically engaged 540 rpm PTO with a multi-disc split torque clutch. Power from the engine, through the transmission to the PTO is direct, and is engaged and disengaged with a simple mechanical lever. This allows drive to be transferred to rear-mounted implements such as sprayers, mowers, threshing machines while on the move keeping maintenance and fuel consumption to minimum.

Heavy Duty Drawbar

Essential for using trailed equipment. The heavy duty drawbar is designed to work with heavy implements. It is the best for haulage work and spraying.



Your Workplace

The MF 3300 Series is available in an open station and cab model

This compact and strong tractor, is narrow enough to pass between plants without risk of damage. The operator environment provides comfort and ease of use during long working hours, often in extreme weather conditions.

The cab is designed for maximum visibility and safety with easy access controls that are very simple to operate efficiently. Comfort is ensured with air-conditioning as standard, and incoming air passes through a cab air filter.




Specifications

	MF 3307	MF3308	
Version	Platform/Cab	Platform/Cab	
Engine Performance			
Engine Power	ISO hp (kW)	75 (55)	86 (63)
Max Torque	Nm @1500 rpm	278	307
Rated engine speed		2,200	2,200
Engine			
Engine type / no. of Cylinders /Capacity / Aspiration	AGCO Power 33 CWC13 / 3 / 3300cc / Turbocharged		
Injection	Common Rail		
Transmission			
12 x 4 Synchronized	●		
Power take-off			
Type	Split Torque, Independent Hydraulic Engagement		
Activation	Lever-operated		
Speed	540 @ 1900 rpm		
Steering			
Hydrostatic	●		
Hydraulic Pump	31		
Hydraulics			
Linkage pump oil flow	Litre/min	18	
Spool Valves oil flow	Litre/min	41	
Pressure	bar	180	
Remote Control Valves		2	
Maximum Lift Capacity	Max kgs	2'100	
Gauges			
Front gauge (minimum / maximum)	mm	1'180 - 1'513 (2WD)	
Rear gauge (minimum / maximum)	mm	1'190 - 1'310 (4WD)	
	mm	966 - 1.300	
Brakes			
Activation / Type	Mechanical / Wet Disc		
Standard wheels and tyres			
4x4	Front	250/80-18	250/80-18
	Rear	14.9x24	16.9x24
Capacities			
Fuel tank	Litres	85	

● Standard ○ Optional

Dimensions (Rops/Cab)

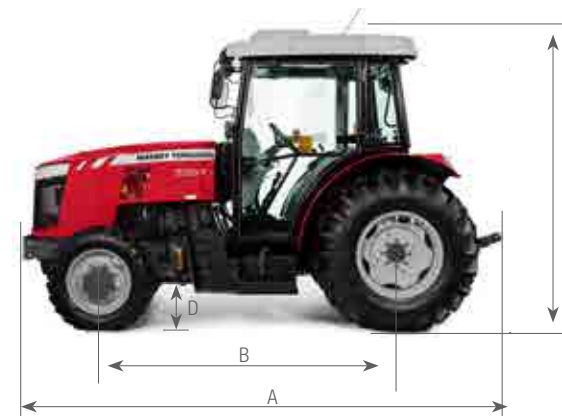

A	Length	mm	3'765
B	Wheelbase	mm	2'300
C	Maximum Height (Rops Tilted/Rops/Cab)	mm	1'609 / 2'327 / 2'356
D	Ground Clearance	mm	300



E	Front outer width	mm	1'406
F	Rear outer width	mm	1'406 / 1'274

Unladen Weight

Rops	MF 3307/MF3308	kgs	2'900
Cab	MF 3307/MF3308	kgs	3'046



MF 3300



MASSEY FERGUSON



Web: masseyferguson.com/en_za/

Facebook: www.facebook.com/MasseyFergusonSA

Twitter: [Twitter.com/MF_RSA](https://twitter.com/MF_RSA)

Instagram: [Instagram.com/masseyfergusonsouthafrica](https://www.instagram.com/masseyfergusonsouthafrica)

YouTube: www.youtube.com/@masseyfergusonafrika

AGCO South Africa Marketing
16 Pomona Road, Kempton Park, Gauteng, 1619



MASSEY FERGUSON® is a worldwide brand of AGCO.

© AGCO South Africa. 2021 | 17505 | English